

# MUNBYN

## MUNBYN

More Choice  
For Your Growing Business

## Logistics Label Printer

# USER GUIDE



Version: 2.0.7

White  Gray  Green  Pink

# Contents

<b>01 Product Introduction</b>	<b>01</b>
1.1 What's in the package?	01
1.2 Printer features	02
<b>02 Set Up The Printer</b>	<b>02</b>
2.1 Quick printer connection	03
2.2 Label setup	03
2.3 Driver installation	04
2.3.1 Windows Driver Installation	04
2.3.2 Mac Driver Installation	04
<b>03 Pro Tips</b>	<b>05</b>
<b>04 FAQ</b>	<b>05</b>
<b>05 LED Status</b>	<b>06</b>
<b>06 Feeder Button Instruction</b>	<b>06</b>
<b>07 Specifications</b>	<b>07</b>
<b>08 Safety Notices</b>	<b>08</b>
<b>09 Tech Support</b>	<b>09</b>

## 01 Product Introduction


### I 1.1 What's in the package?




- |                     |                     |                      |
|---------------------|---------------------|----------------------|
| <b>A</b> Printer    | <b>B</b> USB Cable  |                      |
| <b>C</b> Adapter    | <b>D</b> Power Cord |                      |
| <b>E</b> Quick tips | <b>F</b> Labels     | <b>G</b> User Manual |

• If contents are missing or damaged, please contact us

## I 1.2 Printer Overview

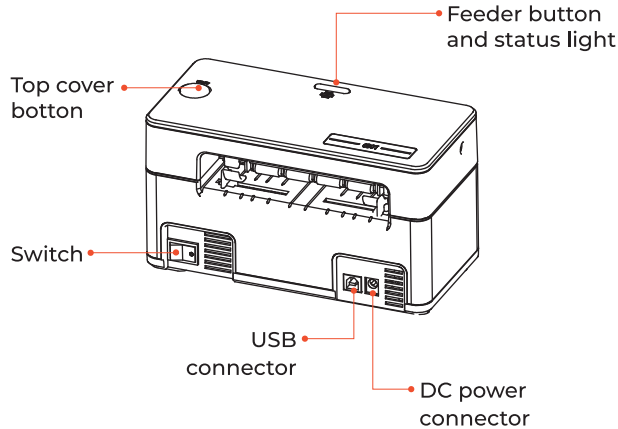


## I 2.1 Quick printer connection

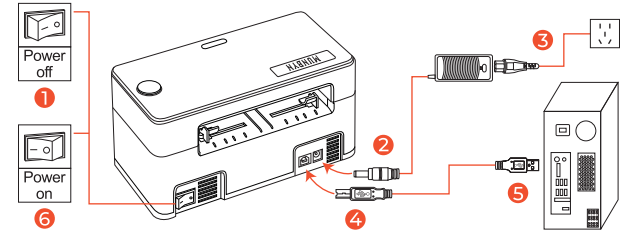

- Please follow the sequence of the above picture to operate

## I 2.2 Label setup



### Automatic label identification:

- Load no less than 4 consecutive labels into the printer.
- After the paper is stable, press and hold feeder button, until you hear a beep.
- Then, the printer will automatically label identification.

## 02 Set Up The Printer

### Recommended:


Watch the short setup video at:  
[www.munbyn.biz/unboxing](http://www.munbyn.biz/unboxing)

## I 2.3 Driver installation


**For the latest driver, please visit:**  
[www.munbyn.biz/941d](http://www.munbyn.biz/941d)

- Please run the downloaded software from the web address indicated above and follow the prompts to complete installation.

### 2.3.1 Windows Driver Installation

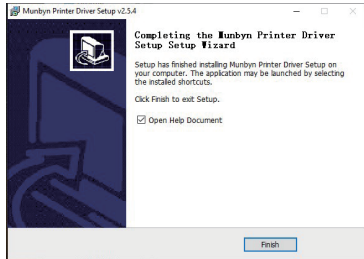

### 2.3.2 Mac Driver Installation

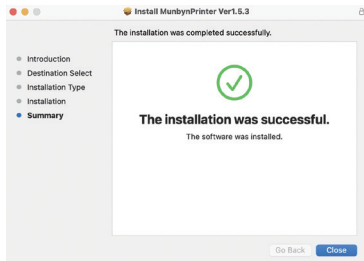

## 03 Pro Tips

- Anytime you change your label, run the automatic label identification.
- Press the feeder button on the printer to **skip a blank label**.
- To run a **self-test**, press and hold the feeder button until you hear two short beeps.
- Avoid **poor quality labels** as they can damage the printer.
- Regularly **clean the printer head**.
- If the **paper is jammed and the red light flashes**, run Automatic label identification.
- Insert Munbyn into the **same USB port** on your computer every time. This will avoid creating duplicate copies of the printer in your operating system..

## 04 FAQ

**FAQ file, please visit:**  
[www.munbyn.biz/941faq](http://www.munbyn.biz/941faq)

## 05 LED Status

Light	Description	Troubleshoot
Green	Normal operation	/
Flashing Red (every 2 seconds)	Label paper is not identified	Run automatic label identification
Flashing Red (every 1 second)	Cover is not closed	Check that the cover is completely closed
Flashing Green and Red	Printer head is overheated	Printer will automatically resume once the printer head has cooled down

## 06 Feeder Button Instruction

Printer status	Feeder button	Function
Printing	Press the button	Pause printing
Standby	Press and hold on until you hear one beep	Automatic label identification
Standby	Press and hold on until you hear five beeps	Reset Printer

## 07 Specification

<b>Method</b>	Direct Thermal
<b>Resolution</b>	203 dpi
<b>Max Printing Speed</b>	150 mm/s
<b>Paper Width</b>	40-110 mm (1.57-4.3 inches)
<b>Paper Thickness</b>	0.06-0.25 mm
<b>Power Adapter</b>	24V / 2A
<b>Printing Life</b>	TPH 100Km
<b>Operating Environment</b>	Temperature: -10 to 50 °C Humidity: 10-90% (non condensing)
<b>Storage Environment</b>	Temperature: -40 to 80 °C Humidity: 5-95% (non condensing)
<b>Connection</b>	USB
<b>Weight</b>	1.90 lbs / 0.9kg
<b>Dimensions</b>	D198 mm * W 96mm *H 109 mm

## 08 Safety Notices

- The printer head can become very hot after printing labels. Do not touch the printer head.
- Do not bend the power cord excessively or place objects on the cord.
- Do not use the printer if you find any irregularities as these could result in fire or electrocution.
- Keep the printer out of reach of children.
- Use only approved accessories and do not try to disassemble, repair the unit by yourself.
- Keep the printer away from water and other objects that could penetrate the components.
- Please unplug the printer when it is not in use for long periods.

## 09 Tech Support

**E-mail:** [support@munbyn.com](mailto:support@munbyn.com)

**Whatsapp:** +8617817881067

**Phone:** +1 403 477 1911

**Skype:** munbyn

**Support time:**

Monday to Friday 24 hours.



MUNBYN provides 18 months warranty and lifetime free service.

If you encounter any issues with the product, please contact the MUNBYN team to promptly receive troubleshooting tips or a replacement.

**Website:** [www.munbyn.com](http://www.munbyn.com)  
(how-to videos, warranty details)