


# Product Specifications

## FlashCheck Jumbo Display Auto-Cal Digital Probe Lab Thermometer

<b>Measurement Range</b>	-40°F to 311°F (-40°C to 155°C)
<b>Operating Range</b>	32°F to 122°F (0°C to 50°C)
<b>Accuracy</b>	±1°F (14°F to 194°F), ±0.5°C (-10°C to 90°C) or ±1% whichever is greatest
<b>Response Time</b>	Less than 6 seconds between 32°F to 77°F (0°C to 25°C)
<b>Sensor</b>	Thermistor
<b>Display Resolution</b>	0.1°F/°C
<b>Display Reading Update</b>	Every 2 seconds
<b>Display Window Size</b>	1.5 in W x 0.5 in H (38mm W x 12.7mm H)
<b>Calibration</b>	Automatic Calibration button
<b>Battery</b>	Button cell alkaline
<b>Body Casing</b>	ABS Plastic
<b>Probe Length</b>	3.9 in (99mm)
<b>Probe Diameter</b>	0.14 in (3.56mm), reduced blunt tip 0.1 in (2.5mm)
<b>Waterproof Rating</b>	IP56
<b>Factory Calibration</b>	NIST traceable calibration
<b>Compliance Certificate</b>	Manufacturer's Certificate of Compliance, NIST traceable, CE Mark

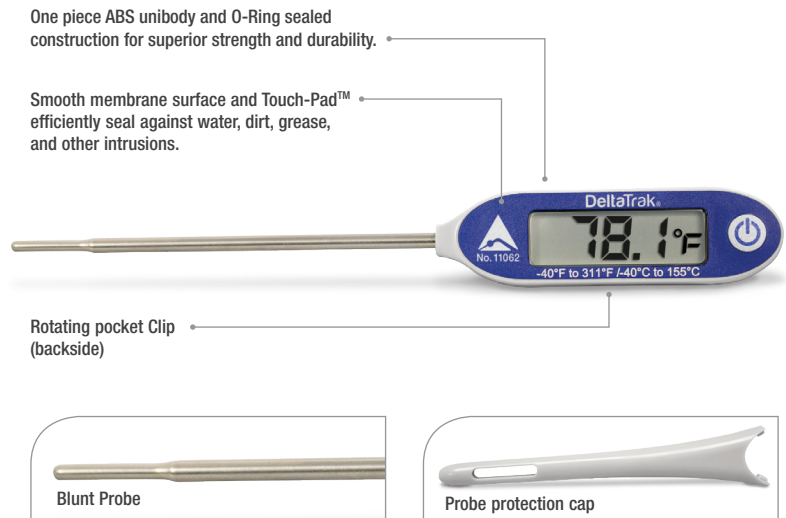

### Model 11062

- °F/°C selectable
- Automatic calibration
- Blunt, rounded tip ideal for scientific, laboratory and veterinary use
- Reduced tip probe provides less than 6 second response time
- Highly visible dual scale jumbo LCD display
- Sealed unibody construction
- IP56 waterproof, sanitizable, dirt and grease resistant
- Automatic shut off saves battery

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

Patent No.  
5,709,476  
5,801,968



SS 11062 18B1

