



QUALITY OF THE WORLD



Corporation information

co.,Ltd dedicate to manufacture excellent and innovative garden equipment and is one of the largest export base for garden powered equipment in china. occupying 100, 000 square meters, with 500 employees, the investment amount of reaches us\$26 million. currently the product series of cover snow thrower, tiller, sweeper and wheel barrow. it continuously diversifies its products range according to customer needs.

has 30 professional technical engineers and a strong R&D team. holds a modern assembly lines and many advanced processing equipments of mould, metalworking and plastic. Advanced technology and technological process, constant innovation of product and advanced equipment lead to both increasingly expanded production capacity and steadily improved quality.

our products carry GS, EPA,UL approvals and meet the requirements of the RoHS and PAH directives. our monthly capacity is 42,000 snow throwers and 20,000 tillers.

we are professional and sincere, with ceaseless innovation and effort, we aspire to not only meet but also exceed our client's requirements. it provides long-term opportunities for to continue grow.

easy life from translates into an effective strategy to provide products and service to achieve safer, clean and environmentally friendly surroundings.





Model T55

Engine net power	3.6kw/3600rpm	Chute rotatung angle	190°
Engine model	G160/ZS 168FA	Working width	56cm
Displacement	163CC	Working thickness	42cm
Start Mode	Recoil start	Spout capacity	9-12m
Fuel tank capacity	3.6L	Wheel size	13*4.1-6
Speed	4 forwarder and 2 reverse	Certificate	GS/CE/EPA
Chute material	Steel		



551Q

Engine net power	3.6kw/3600rpm
Start Mode	Recoil start
Displacement	163CC
Fuel tank capacity	3.6L
Speed	6 forwarder and 2 reverse
Chute rotating angle	190°
Working width	56cm
Working thickness	49cm
Auger type	Steel-toothed
Spout capacity	5-15m
Wheel size	13'
Light	No
Certificate	GS/CE/EPA

651Q

Engine net power	4.1kw/3600rpm
Start Mode	Recoil start
Displacement	196CC
Fuel tank capacity	3.6L
Speed	6 forwarder and 2 reverse
Chute rotating angle	190°
Working width	56cm
Working thickness	49cm
Auger type	Steel-toothed
Spout capacity	5-15m
Wheel size	13'
Light	No
Certificate	GS/CE/EPA



651QE

Engine net power	4.1kw/3600rpm
Start mode	Recoil strat/Battery start
Displacement	196CC
Fuel tank capacity	3.6L
Speed	6 forwarder and 2 reverse
Chute rotating angle	190°
Working width	56cm
Working thickness	49cm
Auger type	Steel-toothed
Spout capacity	5-15m
Wheel size	13'
Light	Yes
Certificate	GS/CE/EPA

1101QE

Engine net power	7.1kw/3600rpm
Displacement	337CC
Start Mode	Recoil start /Electric start
Fuel tank capacity	6.5L
Speed	6 forwarder and 2 reverse
Chute rotating angle	190°
Working width	70cm
Working thickness	54.5cm
Auger type	Steel-toothed
Spout capacity	5-15m
Wheel size	15'
Light	Yes
Certificate	GS/CE/EPA



Model 1650

Rated voltage /Frequency	230V/50Hz 110V/60Hz	Auger diameter	260MM
Power	1,800W	N.W./G.W.	16/18KG
Motor idle speed	1,700RPM	Package measurement	52×52×58CM
Working width	500MM	Certificate	GS/CE/EMC
Working depth	330MM		
Max aguer speed	2000RPM		



Model 8718

Engine model	LONCIN LC154F	Working Thickness	30cm
	1-cylinder, air-cooled, 4-stroke	Max.Throwing Distance	8m
Displacement	87CC	Chute rotating angle	190°
Start mode	Recoil start	Fuel Tank capacity	1.6L
Net Power	1.65kw/3600rpm	Oil capacity	0.35L
Working Width	46cm		

SNOW THROWER SERIES



Model 401Q

Engine net power	3.6kw/3600rpm	Oil tank capacity	0.6L
Start mode	Recoil start	Fuel consumption	0.8L/H
Displacement	163CC	Chute rotating angle	190°
Working width	52CM/20'	Certificate	GS/CE/EPA
Working thickness	25.8CM/10'	Net Weight	43KG
Fuel type	Gasoline	Gross Weight	45KG
Fuel tank capacity	3.6L	Package measurement	69X55.5X48CM

SNOW THROWER SERIES



Model 551Q

Engine net power	3.6kw/3600rpm
Start mode	Recoil start
Displacement	163CC
Working width	56CM/22'
Working thickness	51CM/20'
Fuel type	Gasoline
Fuel tank capacity	3.6L
Oil tank capacity	0.6L
Fuel consumption	0.8L/H
Speed	5 Forward and 2 Reverse
Type of wheel	Snow Hog Tyres
Chute rotating angle	190°
Certificate	GS/CE/EPA
Net Weight	70KG
Gross Weight	75KG
Package measurement	90x62x69CM

Model 651Q

Engine net power	4.1kw/3600rpm
Start mode	Recoil start
Displacement	196CC
Working width	56CM/22'
Working thickness	51CM/20'
Fuel type	Gasoline
Fuel tank capacity	3.6L
Oil tank capacity	0.6L
Fuel consumption	0.8L/H
Speed	5 Forward and 2 Reverse
Type of wheel	Snow Hog Tyres
Chute rotating angle	190°
Certificate	GS/CE/EPA
Net Weight	70KG
Gross Weight	75KG
Package measurement	90x62x69CM

SNOW THROWER SERIES



Model 651QE

Engine net power	4.1KW/3600rpm	Fuel consumption	0.8L/H
Start mode	Recoil strat/Battery start	Speed	5 Forward and 2 Reverse
Displacement	196CC	Type of wheel	Snow Hog tyres
Working width	56CM/22'	Chute rotating angle	190°
Working thickness	51CM/20'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	73KG
Fuel type	Gasoline	Gross Weight	78KG
Fuel tank capacity	3.6L	Package measurement	90x62x69CM
Oil tank capacity	0.6L		

SNOW THROWER SERIES



Model 5556

Engine net power	3.6KW/3600rpm	Fuel consumption	0.8L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	163CC	Type of wheel	Snow Hog Tyres
Working width	56CM/22'	Chute rotating angle	190°
Working thickness	51CM/20'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	80KG
Fuel type	Gasoline	Gross Weight	85KG
Fuel tank capacity	3.6L	Package measurement	91x63x77CM
Oil tank capacity	0.6L		



Model 6556

Engine net power	4.1kw/3600rpm	Fuel consumption	0.8L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	196CC	Type of wheel	Snow Hog Tyres
Working width	56CM/22'	Chute rotating angle	190°
Working thickness	51CM/20'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	80KG
Fuel type	Gasoline	Gross Weight	85KG
Fuel tank capacity	3.6L	Package measurement	91x63x77CM
Oil tank capacity	0.6L		



Model 6562

Engine net power	4.1kw/3600rpm	Fuel consumption	0.8L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	196CC	Type of wheel	Snow Hog Tyres
Working width	61CM/24'	Chute rotating angle	190°
Working thickness	51CM/20'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	82KG
Fuel type	Gasoline	Gross Weight	88KG
Fuel tank capacity	3.6L	Package measurement	91x69x75CM
Oil tank capacity	0.6L		



Model 8062

Engine net power	5.1kw/3600rpm	Fuel consumption	0.8L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	242CC	Type of wheel	Snow Hog Tyres
Working width	61CM/24"	Chute rotating angle	190°
Working thickness	54.5CM/21"	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	85KG
Fuel type	Gasoline	Gross Weight	90KG
Fuel tank capacity	6.0L	Package measurement	91x69x78CM
Oil tank capacity	0.95L		



Model 901Q

Engine net power	6.0kw/3600rpm	Fuel consumption	1.6L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	270CC	Type of wheel	Track
Working width	70CM/28"	Chute rotating angle	190°
Working thickness	54.5CM/21"	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	120KG
Fuel type	Gasoline	Gross Weight	138KG
Fuel tank capacity	6.0L	Package measurement	118X75.5X74CM
Oil tank capacity	0.95L		



Model 1101Q

Engine net power	7.1kw/3600rpm	Fuel consumption	1.6L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	337CC	Type of wheel	Track
Working width	70CM/28'	Chute rotating angle	190°
Working thickness	54.5CM/21'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	120KG
Fuel type	Gasoline	Gross Weight	138KG
Fuel tank capacity	6.5L	Package measurement	118x75.5x74CM
Oil tank capacity	1.1L		



Model 1376

Engine net power	8.5kw/3600rpm	Fuel consumption	2.0L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	389CC	Type of wheel	Track
Working width	76CM/30'	Chute rotating angle	190°
Working thickness	54.5CM/21'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	126KG
Fuel type	Gasoline	Gross Weight	145KG
Fuel tank capacity	6.5L	Package measurement	118.5x82x78CM
Oil tank capacity	1.1L		



Model 901Q

Engine net power	6.0kw/3600rpm	Fuel consumption	1.6L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	270CC	Type of wheel	Snow Hog Tyres
Working width	70CM/28'	Chute rotating angle	190°
Working thickness	54.5CM/21'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	118KG
Fuel type	Gasoline	Gross Weight	136KG
Fuel tank capacity	6.0L	Package measurement	118x75.5x74 CM
Oil tank capacity	0.95L		



Model 1101Q

Engine net power	7.1kw/3600rpm	Fuel consumption	1.6L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Revers
Displacement	337CC	Type of wheel	Snow Hog Tyres
Working width	70CM/28'	Chute rotating angle	190°
Working thickness	54.5CM/21'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	118KG
Fuel type	Gasoline	Gross Weight	136KG
Fuel tank capacity	6.5L	Package measurement	118x75.5x74CM
Oil tank capacity	1.1L		



Model 1376

Engine net power	8.5kw/3600rpm	Fuel consumption	2.0L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	389CC	Type of wheel	Snow Hog Tyres
Working width	76CM/30'	Chute rotating angle	190°
Working thickness	54.5CM/21'	Certificate	GS/CE/EPA
Lamp	With lamp	Net Weight	124KG
Fuel type	Gasoline	Gross Weight	143KG
Fuel tank capacity	6.5L	Package measurement	118.5x82x78CM
Oil tank capacity	1.1L		




Model 1301Q

Engine net power	8.5kw/3600rpm	Fuel consumption	2.0L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	389CC	Type of wheel	Snow Hog Tyres
Working width	106.5CM/42'	Chute rotating angle	190°
Working thickness	50CM/20'	Certificate	GS/CE/EPA
Lamp	With lamp	Neight Weight	160KG
Fuel type	Gasoline	Gross Weight	180KG
Fuel tank capacity	6.5L	Package measurement	133x112x77CM
Oil tank capacity	1.1L		



Model 13107

Engine net power	8.5kw/3600rpm	Fuel consumption	2.0L/H
Start mode	Recoil start/230V(110V)	Speed	6 Forward and 2 Reverse
Displacement	389CC	Type of wheel	Track
Working width	106.5cm/42'	Chute rotating angle	190°
Working thickness	61CM/24'	Certificate	GS/CE/EPA
Lamp	With lamp	Net weight	170KG
Fuel type	Gasoline	Gross weight	190KG
Fuel tank capacity	6.5L	Package measurement	133x119x87CM
Oil tank capacity	1.1L		

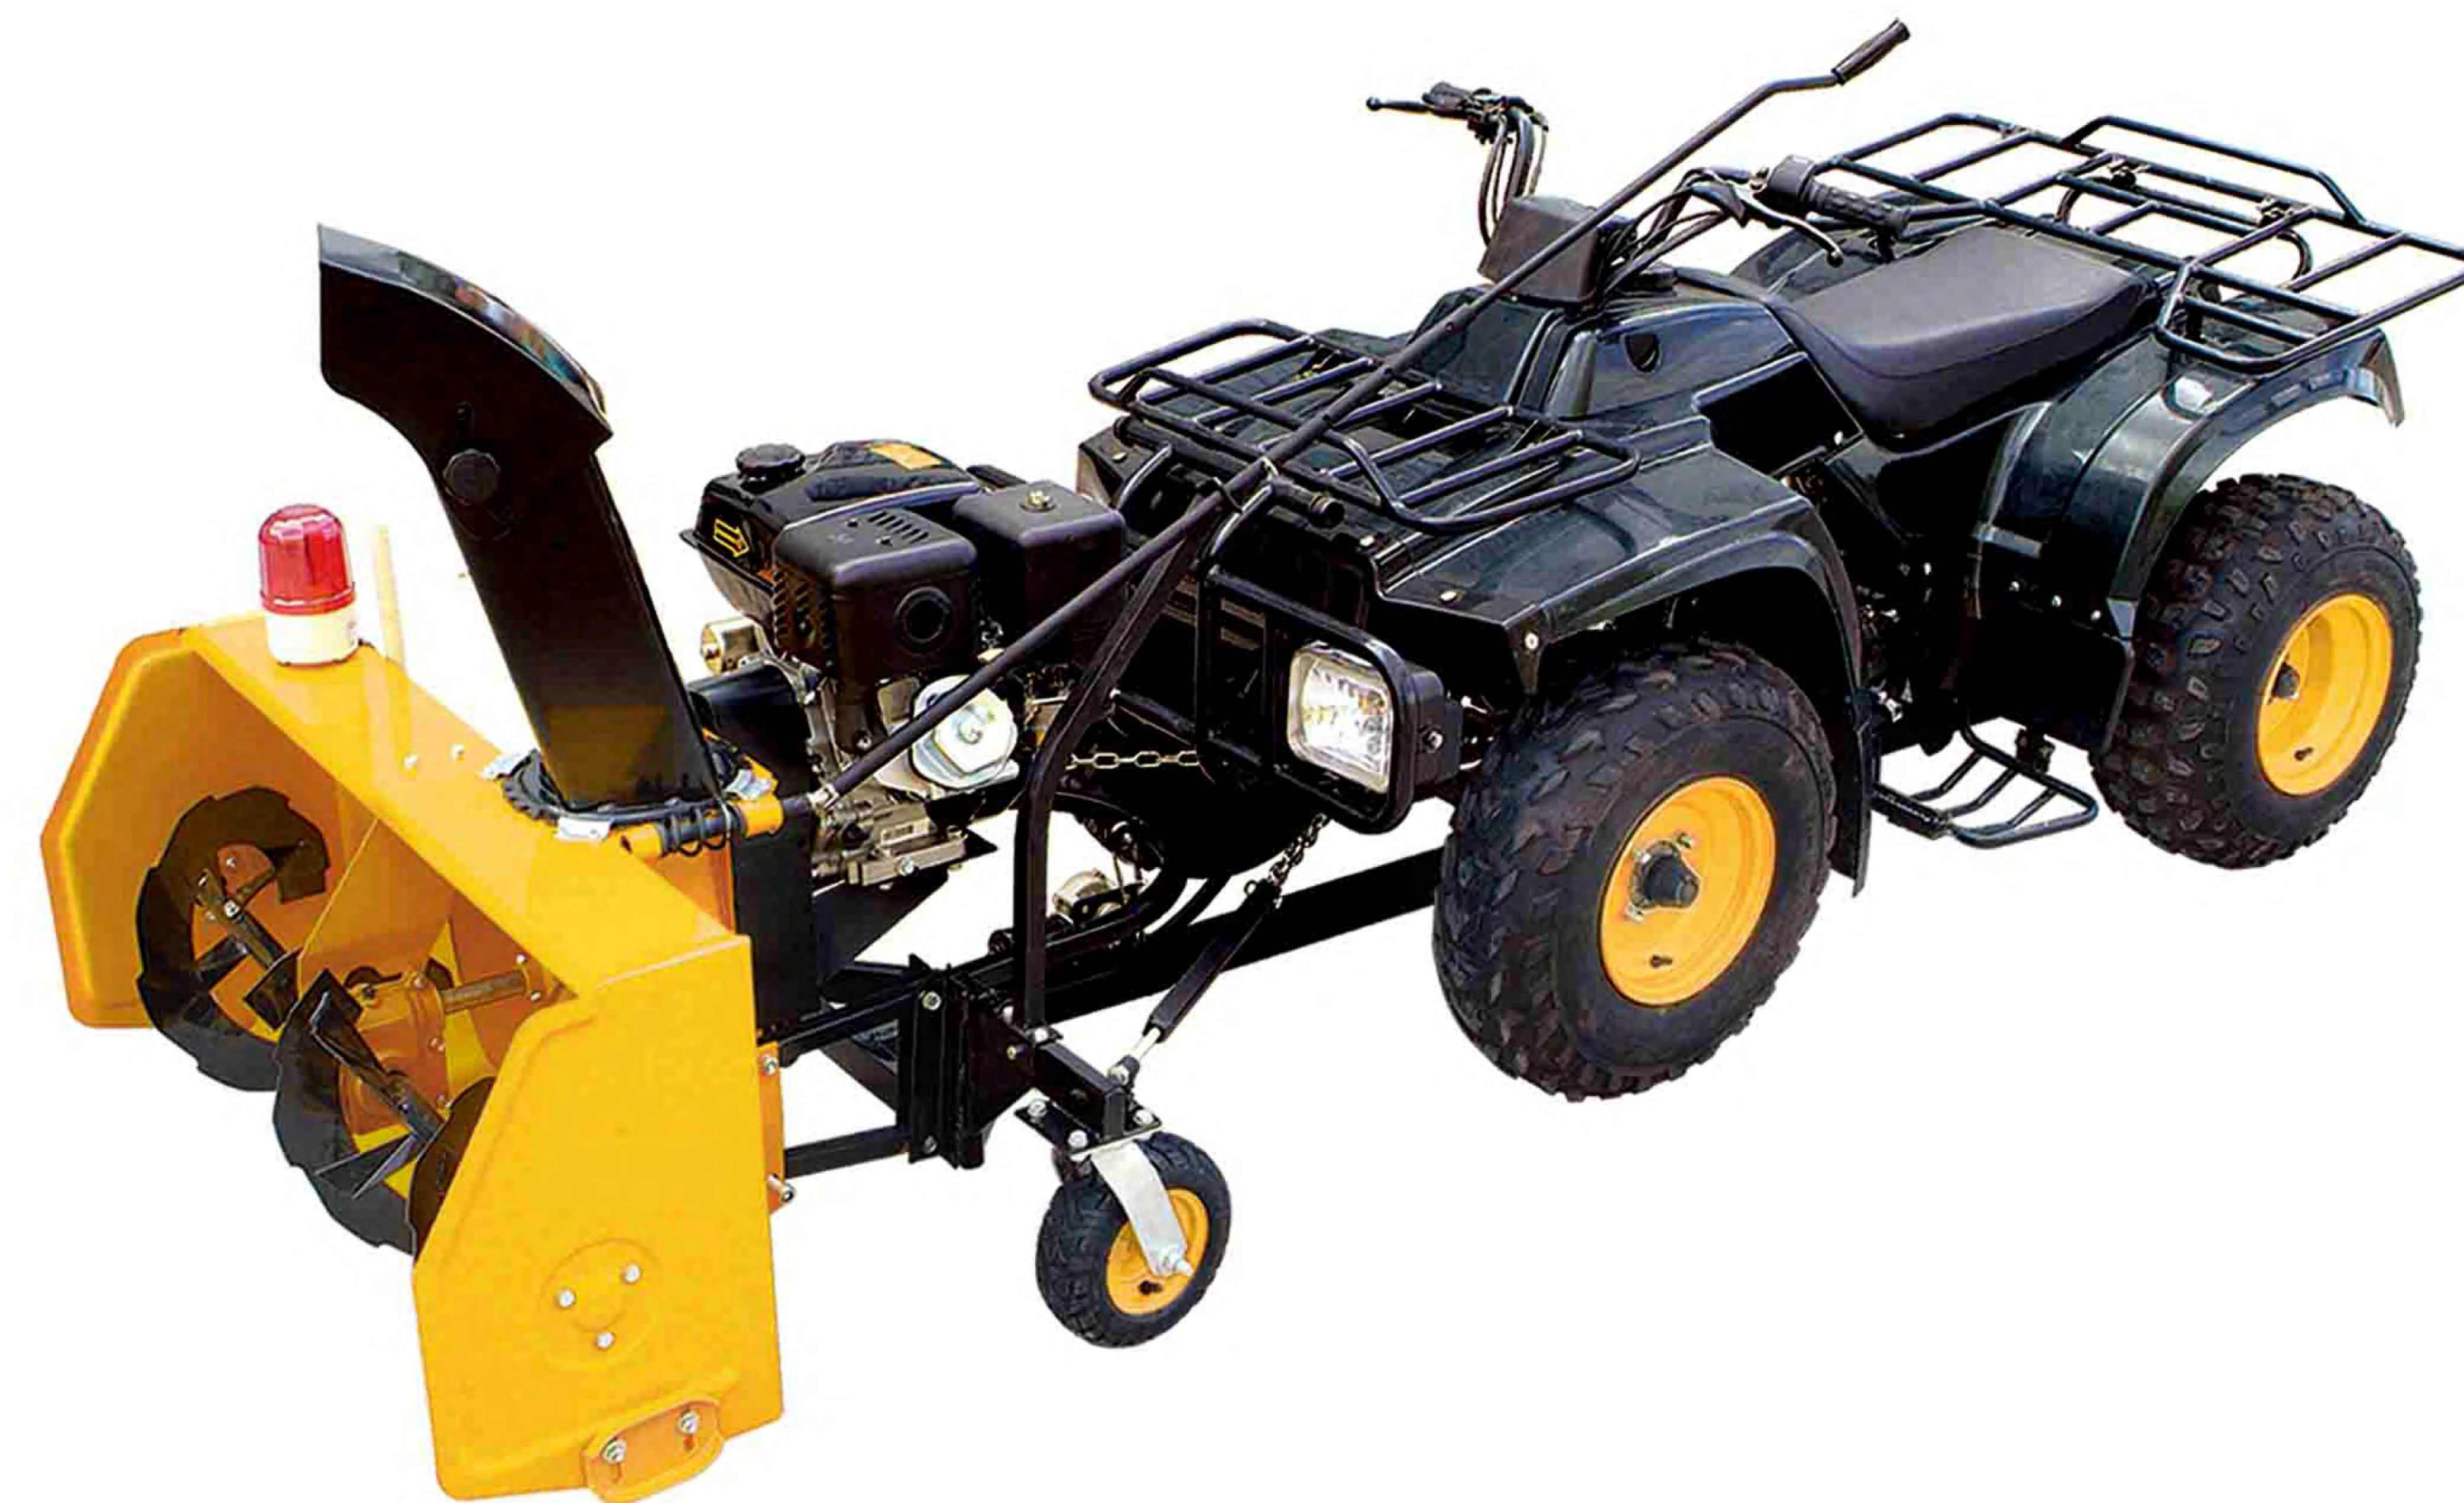

Model 1301Q

Engine net power	8.5kw/3600rpm	Fuel consumption	2.0L/H
Start mode	Recoil start/Battery start	Chute rotating angle	190°
Displacement	389CC	Certificate	GS/CE/EPA
Working width	106.5CM/42'	Net weight	126KG
Working thickness	50CM/20'	Gross weight	145KG
Lamp	With lamp	Package measurement	145x122x88CM
Fuel type	Gasoline		
Fuel tank capacity	6.5L		
Oil tank capacity	1.1L		



Model 4038

Engine net power:	2.7kw/3600rpm
Displacement:	140CC
Fuel tank capacity / L:	1
Oil tank capacity/L:	0.55
Start mode:	Recoil start
Driving mode:	Belt & Worm
Gear box material:	ZL102
Clutch mode:	External clutch
Gear :	1
Working speed/rpm :	120
Working depth/mm :	≥80
Cutter:	2-4A
Working width/mm :	380
Trimming wheel :	No
Tire :	5 inches solid tyre(With wheel Hub)
Fuel type :	Gasoline
Engine option :	ZONGSHEN, LONCIN, B&S
Tire option :	2-4B

Model 5050

Engine net power:	3.0KW/3600rpm
Displacement:	159CC
Fuel tank capacity / L:	1
Oil tank capacity/L:	0.55
Start mode:	Recoil start
Driving mode:	Belt & Worm
Gear box material:	ZL102
Clutch mode:	External clutch
Gear :	1
Working speed/rpm :	120
Working depth/mm :	≥100
Cutter:	2-4D
Working width/mm :	500
Trimming wheel :	No
Tire :	8 inches solid tyre
Fuel type :	Gasoline
Engine option :	ZONGSHEN, LONCIN, B&S
Tire option :	2-4E



Model 5058

Engine : 1P65	Gear box material : ZL102	Trimming wheel : No
Engine net power(KW/rpm) : 3.0/3600	Clutch mode: External clutch	Tire : 8 inches solid tyre
Displacement: 159CC	Gear : 1	Fuel type: Gasoline
Fuel tank capacity / L: 1	Working speed/rpm : 120	Engine option : ZONGSHEN
Oil tank capacity/L : 0.55	Working depth/mm : ≥100	Tire option : 2-4E
Start mode : Recoil start	Cutter: 2-4D	
Driving mode : Belt & Worm	Working width/mm : 500	



Model 6578

Engine : 1P70	Driving mode: Worm	Cutter: 3-4A
Engine net power(KW/rpm) : 3.6/3600	Gear box material: ZL102	Working width/mm : 780
Displacement: 196CC	Clutch mode: External clutch	Trimming wheel : C-1
Fuel tank capacity / L: 1	Gear : 1	Tire: 8 inches whole solid tyre
Oil tank capacity/L: 0.6	Working speed/rpm : 160	Fuel type: Gasoline
Start mode: Recoil start	Working depth/mm : ≥100	Engine option : ZONGSHEN

TILLER SERIES



Model 5580

Engine : 168FA	Gear box material : Q235	Trimming wheel : C-2
Engine rated power(KW/rpm) : 3.2/3600	Clutch mode: External clutch	Tire : 5 inches whole solid tyre
Displacement : 163CC	Gear : 1. -1	Fuel type : Gasoline
Fuel tank capacity /L : 3.6	Working speed/rpm : 150/0/61	Shape dimension : 580×430×700
Oil tank capacity/L: 0.6	Working depth/mm : ≥100	Engine option : ZONGSHEN, LONCIN, LIFAN, B&S
Start mode : Recoil start	Cutter : 3-4D	Cutter option : 3-4B
Driving mode : Belt & chain	Working width/mm : 800	

Accessories option :



Adjustable Ditcher



Single Plough



3.50-6 Iron Wheel



Potato Ditcher



3.5-6/4.0-8 Wheel Axle (Circular Tube)



Planter

TILLER SERIES



Model 6580

Engine : 168FB	Gear box material : Q235	Trimming wheel : C-2
Engine rated power(KW/rpm) : 3.8/3600	Clutch mode : External clutch	Tire : 5 inches whole solid tyre
Displacement : 196CC	Gear : 1. -1	Fuel type : Gasoline
Fuel tank capacity /L : 3.6	Working speed/rpm : 150/0/61	Shape dimension : 580×430×700
Oil tank capacity/L: 0.6	Working depth/mm : ≥100	Engine option : ZONGSHEN, LONCIN, LIFAN, B&S
Start mode : Recoil start	Cutter : 3-4D	Cutter Option : 3-4B
Driving mode : Belt & chain	Working width/mm : 800	

Accessories option :



Adjustable Ditcher



Single Plough



3.50-6 Iron Wheel



Potato Ditcher



3.5-6/4.0-8 Wheel Axle (Circular Tube)



Planter



Model: 7085A

Engine: 170F	Gear box material: Cast iron	Trimming wheel: H-1
Engine rated power (KW/rpm): 4.2/3600	Clutch mode: Internal clutch	Tire: 4.0-8
Displacement: 208CC	Gear: 1、 0、 2、 -1	Fuel type: Gasoline
Fuel tank capacity /L: 3.6	Working speed/rpm: 106/0/139/75	Tire option: 3.5-4 3.5-6 4.0-8
Oil tank capacity/L: 0.6	Working depth/mm: ≥100	Cutter: 4-3A 4-3B Deep tilling cutter.
Start mode: Recoil start	Cutter: 3-4C	Anti-wind cutter、 European Style cutter
Driving mode: Belt & Gear & Chain	Working width/mm: 330/610/810	Engine option: ZONGSHEN, LONCIN, LIFAN, B&S

Accessories option :



Adjustble Ditcher



Single Plough



3.50-6 Iron Wheel



Planter



Potato Ditcher



3.5-6/4.0-8 Wheel Axle (Hexagonal Tube)



4.00-8 Iron Wheel



Grass Cutting Wheel



Model: 7085B

Engine: 170F	Gear box material: ZL102	Trimming wheel: H-1
Engine rated power(KW/rpm): 4.2/3600	Clutch mode: External clutch	Tire: 3.5-6
Displacement : 208CC	Gear 1、 0、 2、 -1	Fuel type: Gasoline
Fuel tank capacity /L: 3.6	Working speed/rpm: 106/0/139/75	Tire option: 3.5-4 3.5-6
Oil tank capacity/L: 0.6	Working depth/mm: ≥100	Cutter option: 4-3A 4-3B Deep tilling cutter.
Start mode: Recoil start	Cutter: 3-4C	Anti-wind cutter、 European Style cutter
Driving mode: Belt & gear & chain	Working width/mm: 330/610/810	

Accessories option :



Adjustble Ditcher



Single Plough



Planter



Potato Ditcher



3.5-6/4.0-8 Wheel Axle (Hexagonal Tube)



3.50-6 Iron Wheel

TILLER SERIES



Model: 90125

Engine : 177F	Gear box material : ZL+Cast iron (or Cast iron)	Trimming wheel : H-2
Engine rated power(KW/rpm) : 5.5/3600	Clutch mode : Internal clutch	Tire : 4.0-8
Displacement : 270CC	Gear : 2、 0、 1、 -1	Fuel type : Gasoline
Fuel tank capacity /L : 6	Working speed/rpm : 149/0/82/61	Power option : LONCIN, ZONGSHEN, LIFAN
Oil tank capacity/L : 1.1	Working depth/mm : ≥100	Tire option : 4.0-8 5.0-10
Start mode : Recoil start	Cutter : 4-4A	Cutter option : 5-4A Deep tilling cutter、
Driving mode : Gear	Working width/mm : 600/900/125	Anti-wind cutter、 European Style cutter

Accessories option :



TILLER ACCESSORIES





Model 5562

	Snow Thrower	Snow Sweeper	Snow Blade
Start Mode	Recoil start	Recoil start	Recoil start
Engine net power	3.6kw/3600rpm	3.6kw/3600rpm	3.6kw/3600rpm
Displacement	163CC	163CC	163CC
Fuel tank capacity	3.6L	3.6L	3.6L
Oil tank capacity	0.6L	0.6L	0.6L
Speed	4 forward and 2reverse	4 forward and 2reverse	4 forward and 2reverse
Chute rotating angle	190°	22°	22°
Working width	56cm	62cm	85cm
Working thickness	42cm		37cm
Spout capacity	5-15m		
Wheel size	13*4.1-6	13*4.1-6	13*4.1-6
Certificate	GS/CE/EPA		



Model 5580

Engine net power	3.6kw/3600rpm
Start mode	Recoil start/electric start
Displacement	163CC
Fuel tank capacity	3.6L
Oil tank capacity	0.6L
Plug	110V/230V
Area sweep	3840 M2/H
Working width	80cm
Working speed	2.0~5.0 KM/H
Speed	4 Forward speed
Fuel type	Gasoline
Certificate	GS/CE/EPA
Package measurement	157X78X85CM

Model 6510

Engine net power	4.1kw/3600rpm
Start mode	Recoil start/electric start
Displacement	196CC
Fuel tank capacity	3.6L
Plug	110V/230V
Area sweep	4800 M2/H
Working width	100cm
Working speed	2.0~5.0 KM/H
Speed	4 Forward speed
Fuel type	Gasoline
Certificate	GS/CE/EPA
Package measurement	157X78X85CM



Model 1110

Engine net power	7.1kw/3600rpm	Speed	6 Forward and 2 Reverse
Start mode	Recoil start/ Electric start 230V(110V)	Type of wheel	Snow Hog Tyres
Displacement	337CC	Fuel type	Gasoline
Fuel tank capacity	6.5L	Fuel tank capacity	6.5L
Oil tank capacity	1.1L	Oil tank capacity	1.1L
Lamp	With lamp	Fuel consumption	1.6L/H
Area sweep	4900 M2/H	Certificate	GS/CE/EPA
Working width	110CM	Net Weight	165KG
Brush diameter	62CM	Gross Weight	180KG
Brush speed	150RPM	Package measurement	160x130x80CM



Model 800

Drive	Manual	Certification	GS / ROHS
Container capacity	40 L	Net Weight	11 KG
Speed	4 KM/H	Gross Weight	13 KG
Area sweep	2800 M ² /H	Package measurement	81X69X37 CM



Model 573

Engine net power	3.6kw/3600rpm
Start mode	Recoil start/electric start
Displacement	163CC
Fuel tank capacity	3.6L
Oil tank capacity	0.6L
Area sweep	1445 M2/H
Working width	73cm
Working speed	1.98 KM/H
Fuel type	Gasoline
Certificate	GS/CE/EPA
Package measurement	85X66X85CM

Model 657

Engine net power	4.1kw/3600rpm
Start mode	Recoil start/electric start
Displacement	196CC
Fuel tank capacity	3.6L
Oil tank capacity	0.6L
Area sweep	1445 M2/H
Working width	73cm
Working speed	1.98 KM/H
Fuel type	Gasoline
Certificate	GS/CE/EPA
Package measurement	85X66X85CM



Model 655

Engine net power	4.1kw/3600rpm
Start mode	Recoil start/Electric start
Displacement	196CC
Fuel tank capacity	3.6L
Fuel type	Gasoline
Forward speed	4KM/H
Reverse speed	2KM/H
Type of transmission	Continuously variable transmission
Capacity	300kg weight
Certificate	GS/CE/EPA
Dimensions	Length - 178.5CM Width - 76.5CM Height - 109.3CM
Package measurement	187x85x118CM

Model B401

Engine net power	2.7kw/3600rpm
Fuel type	Gasoline
Displacement	140CC
Fuel tank capacity	2.5L
Oil tank capacity	0.6L
Fuel consumption	0.8 L/H
Maximum Lenth	143 CM
Maximum width	70 CM
Maximum high	91 CM
Certificate	GS/CE/EPA
Forward speed	3.6KM/H
Reverse speed	2.0 KM/H
Maximum load on a flat surface	100 KG
Maximum volume	85 L
Net Weight	65 KG
Gross Weight	67KG
Package measurement	116X70X65CM