

INTERIOR APPLICATION / MINI BRIDGE
SMART BRIDGE / ROLLER SYSTEM
CURTAIN TRACK / CORD-LIFTING SYSTEM
DOUBLE-GLAZED SHADING / PROJECTION SCREEN
INSECT SCREEN / CONTROL SYSTEM
ACCESSORIES / OTHERS

INTERIOR APPLICATION 2020

01

- 01 Company Introduction
- 04 Product Certification
- 06 Electronic Assembly
- 08 Motor Production
- 07 Trade Fair Presence
- 08 Project References
 - 09 Business Performance
 - 10 Export Market
- 11 Product Applications
- 12 Technical Support

03

Motorized Roller System

- 37 Ø15 & Ø20 & Ø25 Radio+ Battery Motor
- 40 Ø25 Radio+ Motor With External Battery
- 41 Ø28 Radio+ Battery Motor
- 42 Ø28 Radio+ Motor With External Battery
- 43 Ø35 Radio+ Battery Motor
- 44 Ø35 Radio+ Motor With External Battery
- 45 Ø35 Low-noise Radio+ Motor
- 46 Ø35 Low-noise Electronic Motor
- 47 Ø35 & Ø45 Low-noise Radio+ Motor
- 49 Ø45 Radio+ Battery Motor
- 50 Ø45 Radio+ Motor With External Battery
- 51 Ø45 Low-noise Radio+ Motor
- 52 Ø45 Quiet Electronic Motor

02

Automation System

- 21 Bi-directional System Structure
- 23 Tap into Internet of Things
- 26 Bridges
- 28 Scene Controller
- 29 Wi-Fi Products
- 32 RS485 Motor
- 33 KNX Motor
- 34 Z-Wave Motor

04

Motorized Cord-lifting System

- 55 Radio+ motor for 1 inch Venetian
- 57 Radio+ motor for TDBU system
- 58 Radio+ motor for 2 inch wood venetian
- 59 Radio+ Dual-shaft motor for 2 inch Fabric Venetian
- 60 Radio+ tilt-motor for 2 inch wood venetian

05

Motorized Curtain Track

- 63 Radio+ Horizontal mounting curtain motor
- 64 Radio+ Multi-feature Curtain motor
- 69 Track & Accessories B#
- 71 Radio+ motor for Vertical blinds
- 72 Radio+ Tilt-motor for Vertical blinds
- 73 Radio+ Brush-less motor for Vertical blinds
- 74 Vertical Blinds Accessories

07

Product Parameter

- 105 DV Series
- 107 DT Series
- 109 DK Series
- 110 DS/DB Series
- 111 LE/LEU Series
- 112 CE/TE Series
- 113 S Series
- 114 Q Series
- 115 R Series
- 117 B Series
- 119 E Series

06

Control System

- 77 Emitters
- 89 Receivers
- 97 Switches
- 98 Switch Converter
- 98 Repeaters
- 99 Solar Panel
- 101 Dry Contact to Radio
- 102 Group Controllers

08

Motor Accessories

- 123 Tube & Accessories
- 125 Crown & Adaptor
- 129 Tube Idler
- 130 Wall Mount Bracket
- 131 Click-in Bracket
- 132 Venetian Blinds Accessories
- 133 Tube Fitting Quick Guide



01 Company Profile

- 03 Company Introduction
- 04 Product Certification
- 05 Electronic Assembly
- 06 Motor Production
- 07 Trade Fair Presence
- 08 Project References
- 09  Business Performance
- 10  Export Market
- 11 Product Applications
- 13 Technical Support



N0.

Product

Application

1



DM
Tubular Motor



Motorized
Roller Blinds



Motorized
Venetian Blinds



Motorized
Roman Blinds



Motorized
Pleated Blinds




Motorized
Ceiling Curtain



Motorized
Sheer Blinds



Outdoor Motorized
Roller Blinds



Motorized
Awning



Motorized
Roller Shutter



Motorized
Lift Curtain



Motorized
Honeycomb Blinds



Motorized
Shangri - La Blinds



Motorized
Roller Door



Motorized
Window Awning



Motorized
Louver



Motorized
Projector Rack



Motorized
Banner Lifter



Motorized
Projection Screen

2



DM
DC Tubular Motor



Motorized
Roller Blinds



Motorized Aluminium
Venetian Blinds



Motorized
Roman Blinds



Motorized
Sheer Blinds



Motorized
Shangri - La Blinds



Motorized Aluminium
Venetian Blinds



Motorized
Screen

3



DV
Venetian Motor



Motorized Aluminium
Venetian Blinds



Double-glazed
Aluminium
Venetian Blinds



Motorized
Pleated Blinds



Motorized
Honeycomb Blinds



Motorized
Day&Night Blinds



Motorized
Roman Blinds



Motorized Wooden
Venetian Blinds



Motorized
TDBU Blinds

4














DT
Curtain Motor



Motorized
Curtain





Motorized
Lift Curtain

NO.	Product	Application
5	 <p data-bbox="459 451 504 485">DJ</p> <p data-bbox="413 495 544 516">Window Actuator</p>	 <p data-bbox="927 471 991 506">Motorized Louver</p> <p data-bbox="1043 471 1110 506">Window Actuator</p>
6	 <p data-bbox="453 697 496 731">DV</p> <p data-bbox="389 747 568 768">Outdoor Venetian Motor</p>	 <p data-bbox="887 707 1031 741">Motorized Aluminium Venetian Blinds</p>
7	 <p data-bbox="453 943 504 977">DK</p> <p data-bbox="400 989 555 1010">Vertical Blinds Motor</p>	 <p data-bbox="911 979 1007 1014">Motorized Vertical Blinds</p>
8	 <p data-bbox="453 1191 504 1225">DV</p> <p data-bbox="400 1237 555 1257">Wood Shutter Motor</p>	 <p data-bbox="911 1221 1007 1255">Motorized Wood Shutter</p>
9	 <p data-bbox="448 1487 504 1522">DM</p> <p data-bbox="424 1530 528 1550">Pergola Motor</p>	 <p data-bbox="932 1487 986 1507">Pergola</p>
10	 <p data-bbox="453 1715 504 1749">DD</p> <p data-bbox="421 1761 536 1782">Control System</p>	<p data-bbox="895 1679 1023 1715">Compatible With All Dooya Products</p>

TECHNICAL SUPPORT

QUICK CALCULATION OF TORQUE & WEIGHT

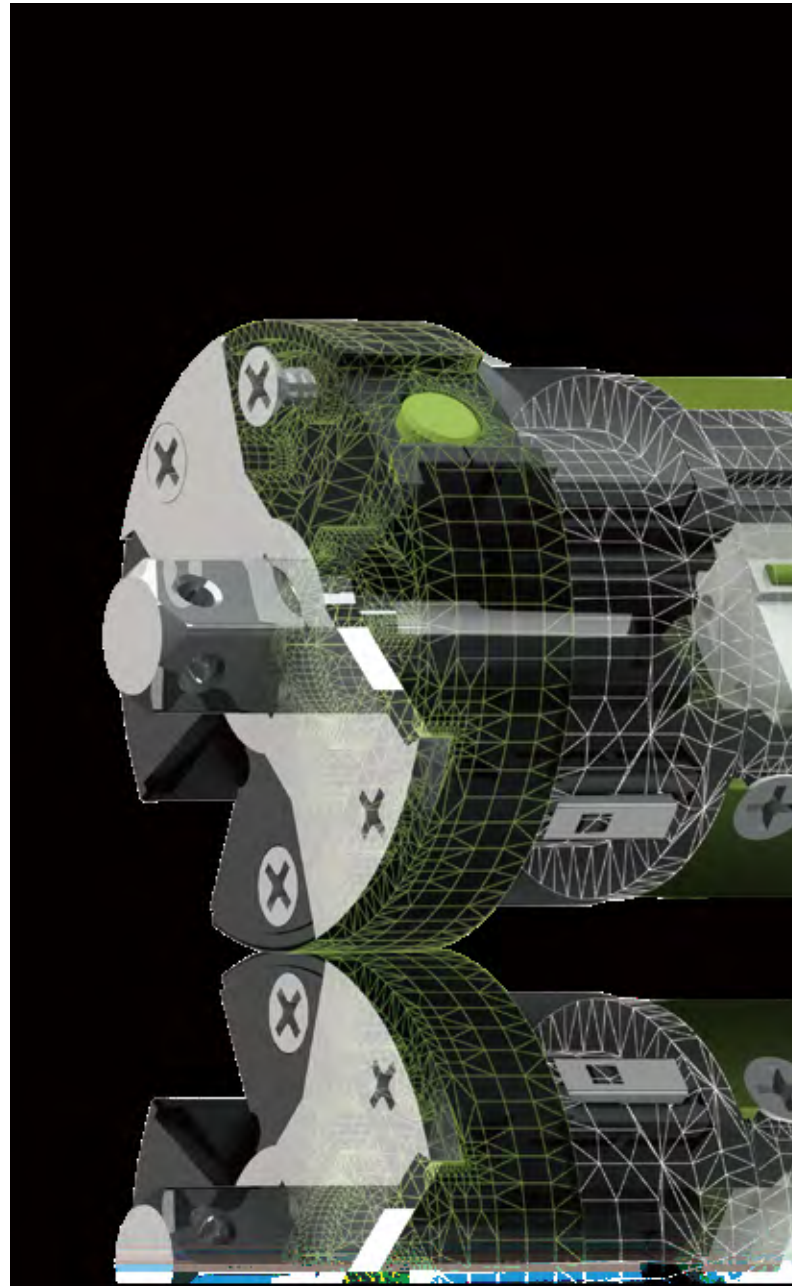

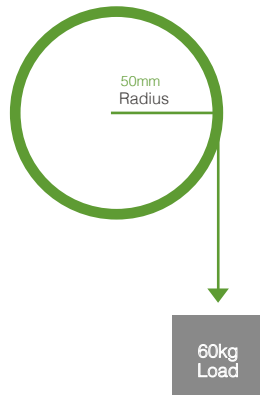



? N·m

$$\begin{aligned} \text{Torque (N.m)} &= \text{Radius (mm)} \times \text{Load (kg)} \div 100 \\ &= 50 \text{ (mm)} \times 60 \text{ (kg)} \div 100 = 30 \text{ (N.m)} \end{aligned}$$



? kg

$$\begin{aligned} \text{Load (Kg)} &= \text{Torque (N.m)} \times 100 \div \text{Radius (mm)} \\ &= 30 \text{ (N.m)} \times 100 \div 50 \text{ (mm)} = 60 \text{ (kg)} \end{aligned}$$


Bemark: Calculation in diagram base on the Newton's Law

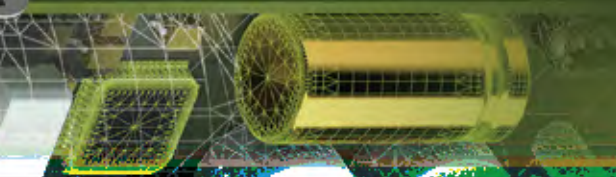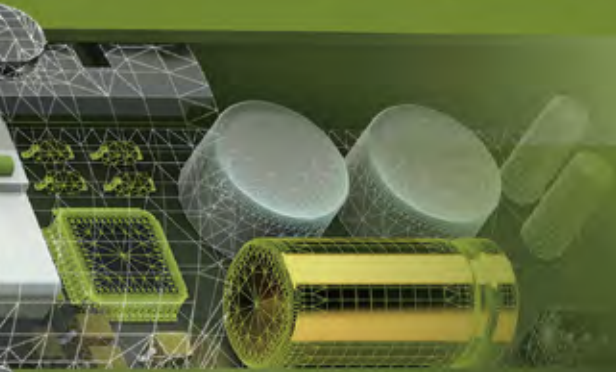


TECHNICAL SUPPORT

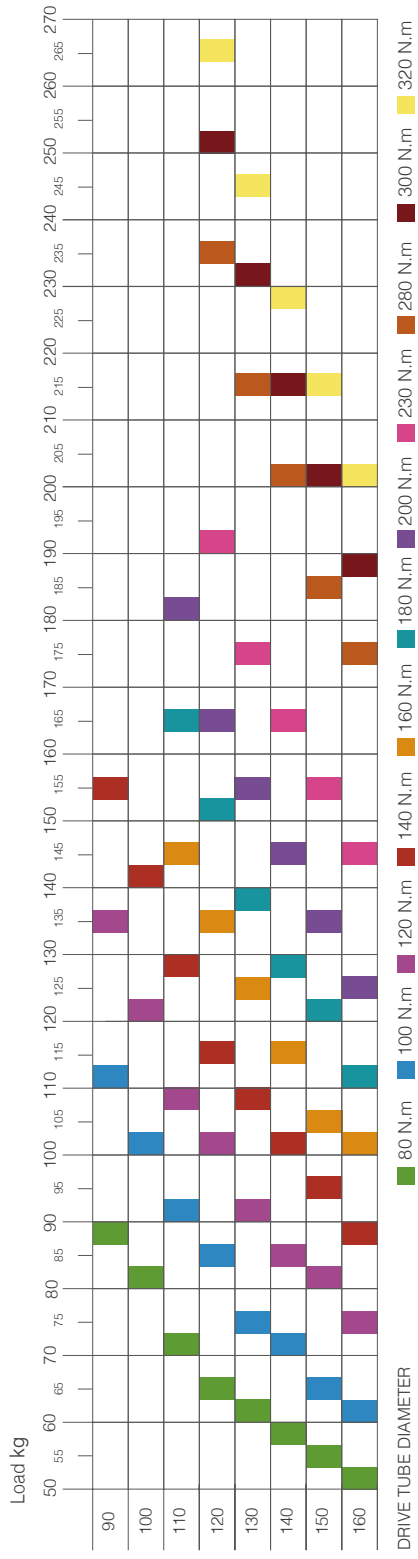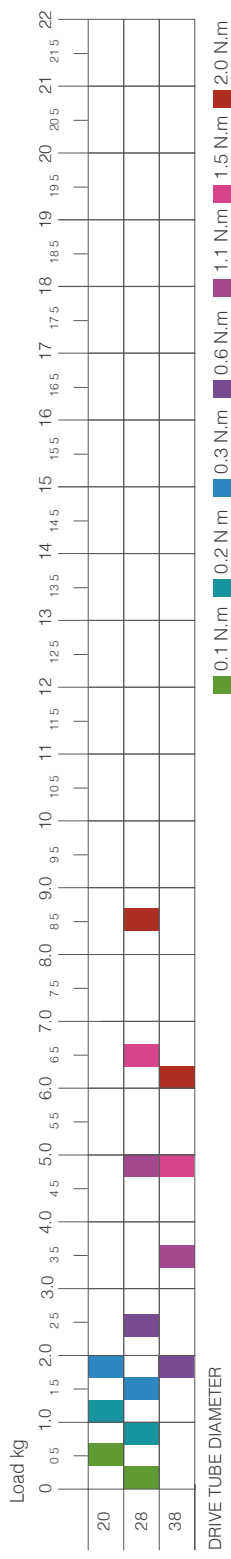



Remark: Diagram here is only reference for end users

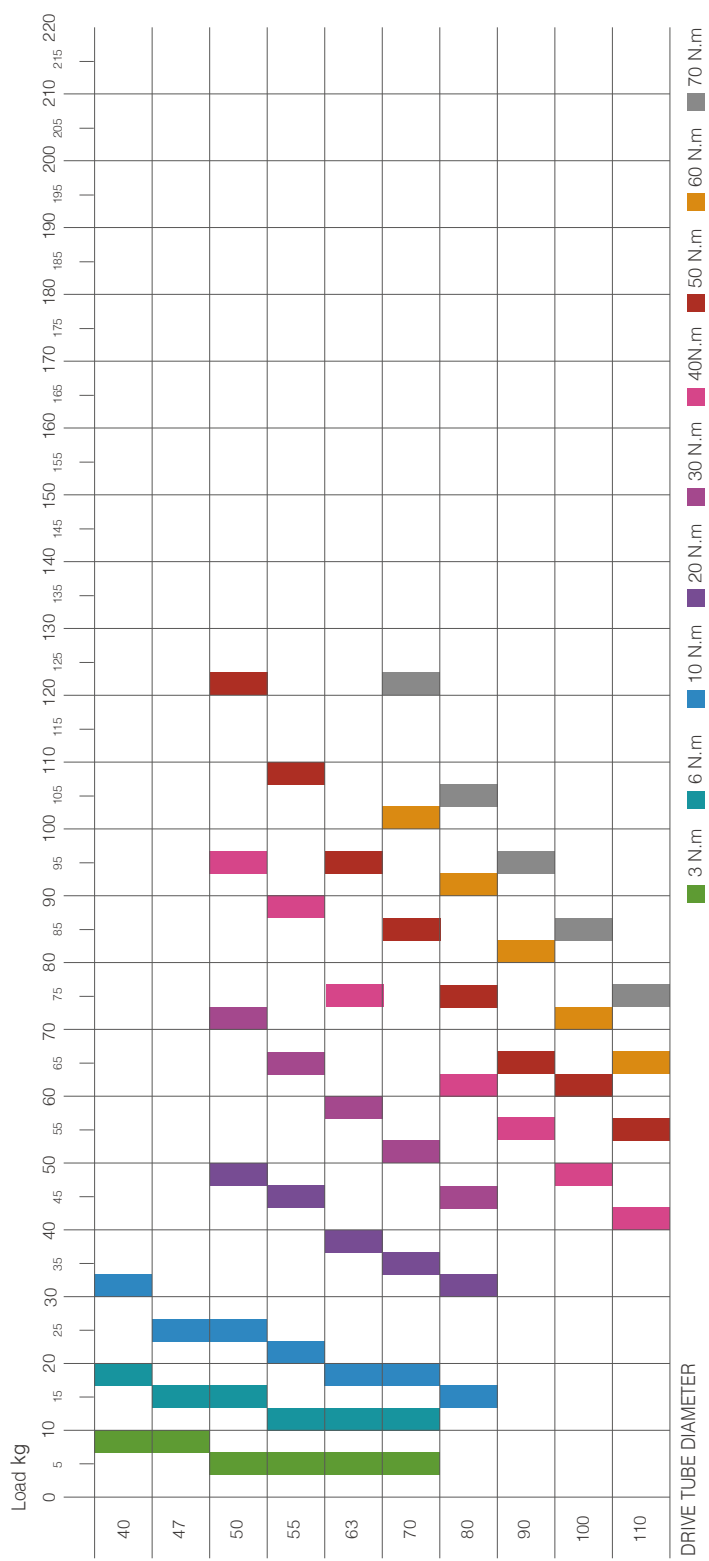

DOOYA QUIET MOTOR
DOUBLE HELICAL
GEAR TECHNOLOGY

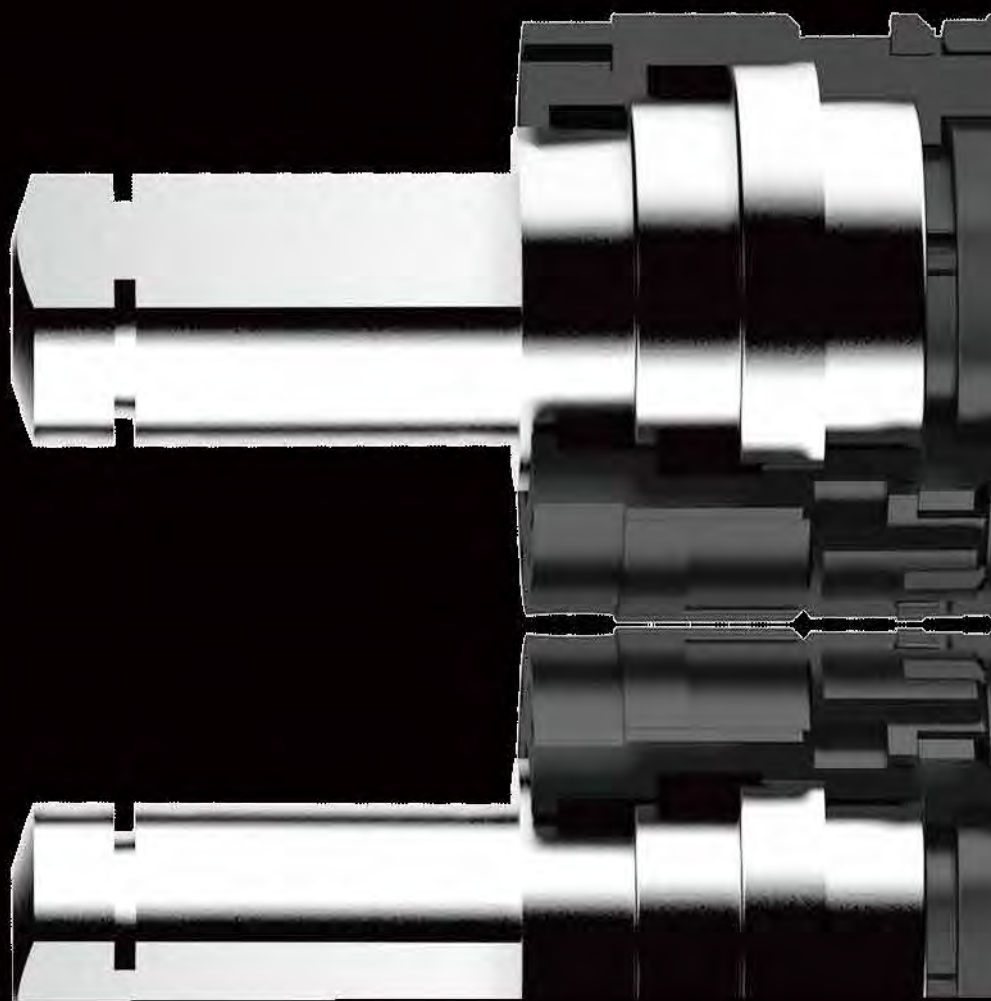

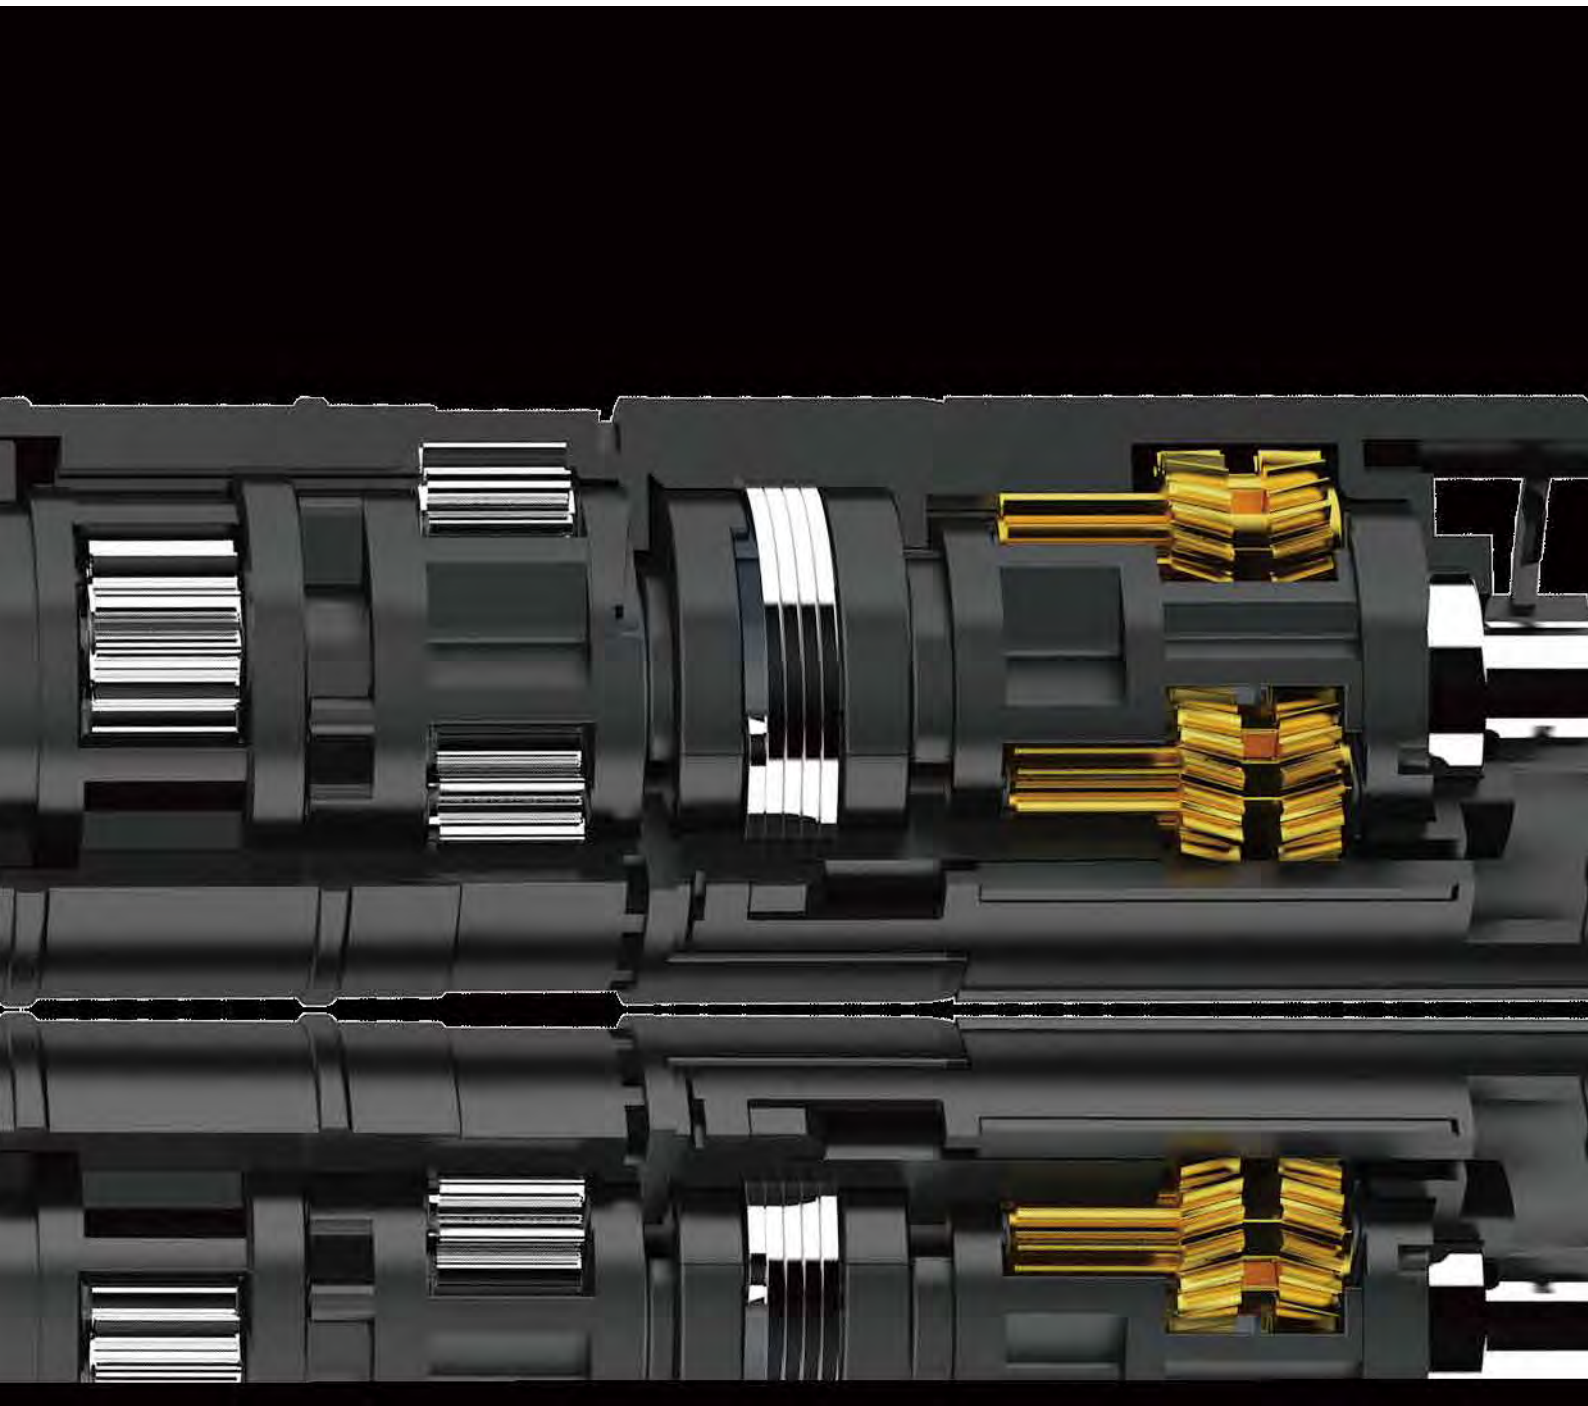



Automation System

- 21 Bi-directional System Structure
- 23 Tap into Internet of Things
- 25 Bridges
- 28 Scene Controller
- 29 Wi-Fi Products
- 32 RS485 Motor
- 33 KNX Motor
- 34 Z-Wave Motor





PHILIPS
hue



Amazon Alexa

Google Assistant



TUBULAR MOTOR



Smartphone & APP



3rd Party Interface

Control4



THINGS



Yeelight



IFTTT



LIFX



Wi-Fi Application



RF Application




Bridge




Scene Controller

Remotes & Sensors



INTERNET

- ““ OK Google, Start my day
 - ““ OK Google, Open shutter to 20%
- ““ Ok Google, Turn on scene
 - ““ OK Google, Good night




Skills & features developed, tested and published for both Amazon Alexa and Google Assistant. Enabled voice control and interaction of motorized window coverings through customized voice command and favorites set by users.

Link up with IFTTT (IF This Then That) provides much broader options to users of our motorized products, creating new ways to interact their window coverings with existing smart home devices and numerous IoT services available over the INTERNET.



- ““ Alexa, Start my day
 - ““ Alexa, Turn on scene
- ““ Alexa, Turn on shutter to 50%
 - ““ Alexa, Good night.

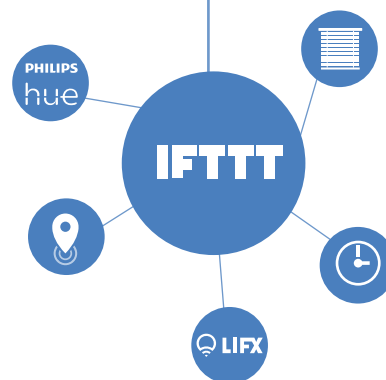

TAP INTO INTERNET OF THINGS

NATIVE SIRI INTEGRATION

"Siri, close bedroom curtain."
Simple as that.

* For iOS12 or above only.



STAY UPDATED

The motor updates realtime positions, low-battery warning or other status back to your smartphone.



SCENE CONTROLLER

Activate the scene by one button



PLAN & PLAY

One window, all windows, 7:01am, every weekday evening, 5 minutes after sunset... plan and create your own automatic schedule for all your motorized window coverings and sun shading at home.



EASY & LAZY

Manual work is no longer necessary to move the blinds at home, automated actions and a simple touch on the phone is sufficient, even when you are traveling.

To download the APP, search "Shade Connector" on "Apple Store" or "Google Play".




MINI BRIDGE



Mini Bridge DD1554

Mini bridge is a Wi-Fi to RF+ interface. It builds a connection via user's Wi-Fi router at home and enables user to control motorized window covering and sunshading products with designated smartphone applications and interaction with ecosystem such as Amazon Alexa, Google Assistant, etc, via cloud API.

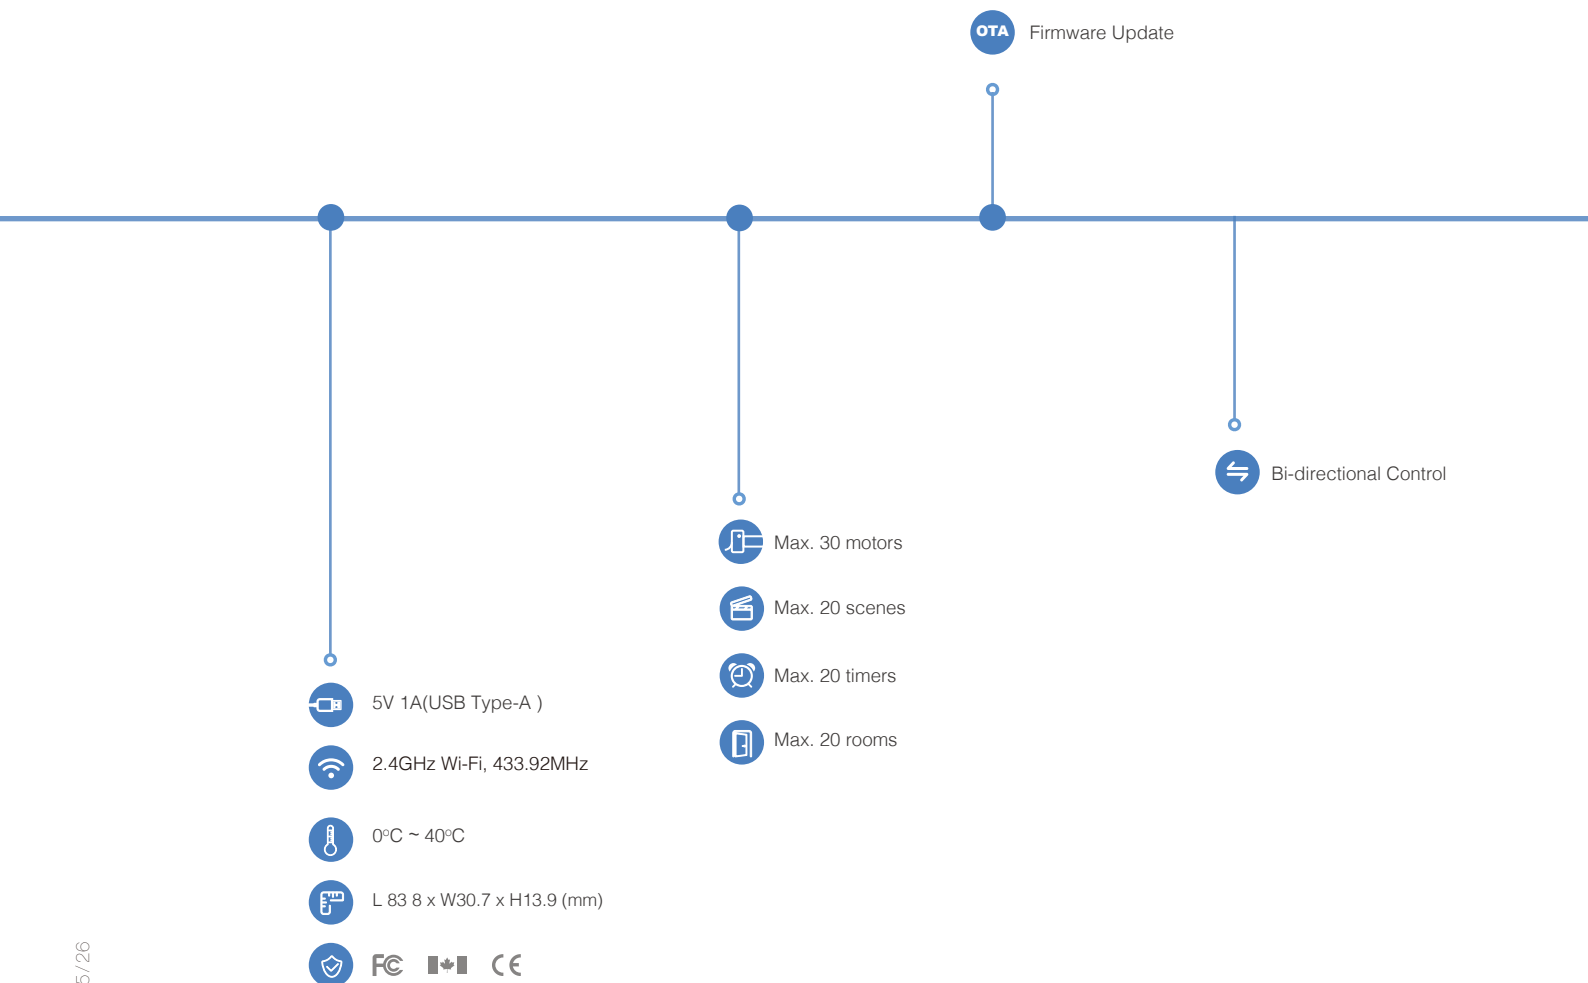

WI-FI BRIDGE

Wi-Fi bridge is a Wi-Fi to RF+ with integrated RS485 interface. It builds a connection via user's Wi-Fi router at home and enables user to control motorized window covering and sunshading products with designated smartphone applications and interaction with ecosystem such as Amazon Alexa, Google Assistant, etc, via cloud API. The RS485 interface offers additional integration option into the third party home automation systems.



5V 1A (micro USB)

2.4GHz Wi-Fi, 433.92MHz

RS485 (RJ11)

0°C ~ 40°C

L 132.2 * W 75 * H 36 (mm)

FC ■■■ CE

OTA Firmware Update

Max. 30 motors

Max. 20 scenes

Max. 20 timers

Max. 20 rooms

Bi-directional Control


One Way Radio Control

POE BRIDGE

POE bridge is a Ethernet to RF Radio interface. It builds a connection via user's Internet Router at home and enables user to control motorized window covering and sunshading products with designated smartphone applications and interaction with ecosystem such as Amazon Alexa, Google Assistant, etc, via cloud API. The Ethernet interface offers additional integration option into the third party home automation systems.



POE Bridge DD7005

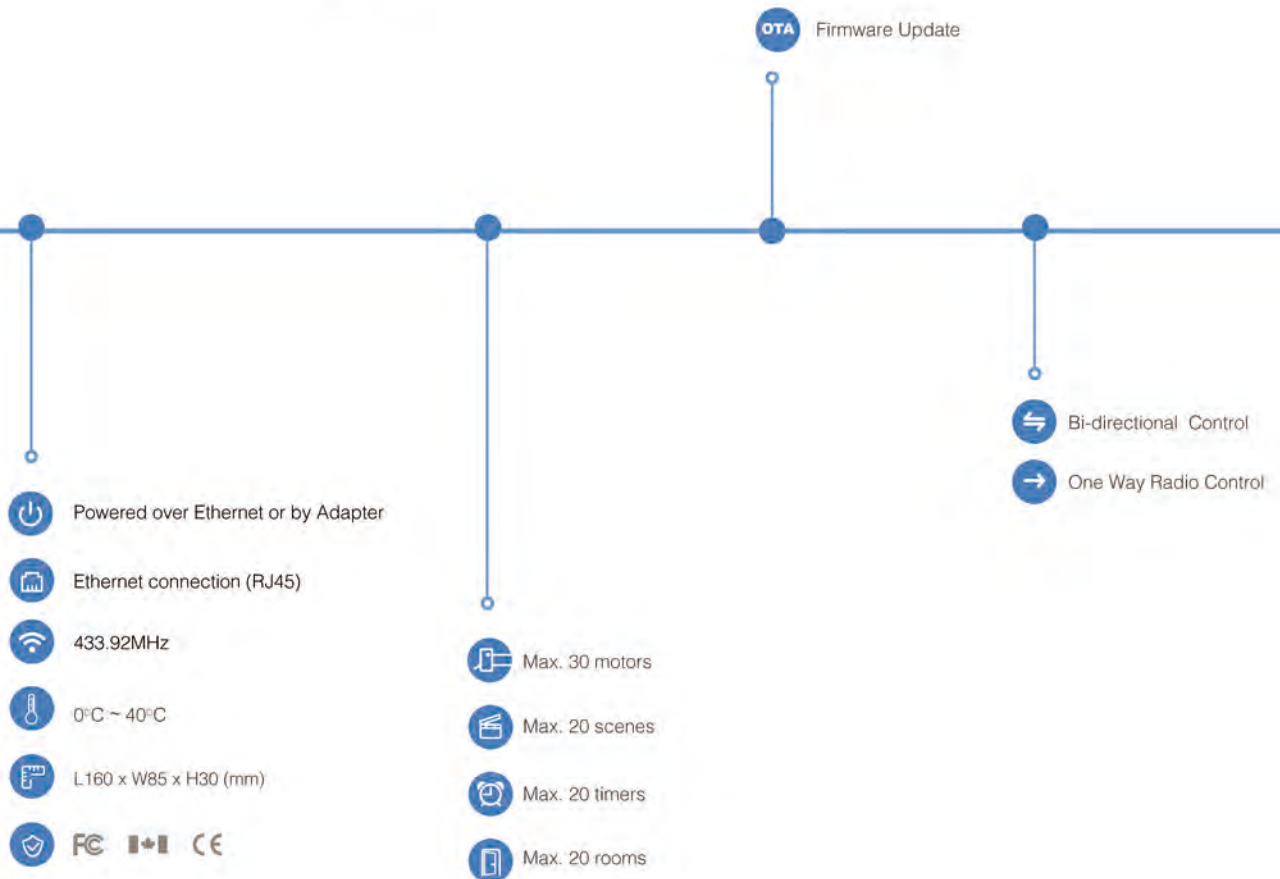

SCENE CONTROLLER

Scene controller is a portable scene control device, it allows you to control your shades by activating scenes which have been created and allocated by the Connector App to the controller. After setting, no need internet access and smartphone APP any more.



Scene Controller DD6020



433.92MHz



CR2430



Configure by the Smart Phone APP



0°C ~ 40°C



L115.8 x 70.2mm x H11.25 (mm)



Works with Wi-Fi Bridge, Mini Bridge, and POE Bridge



Control max. 4 scenes (No internet requested)



WI-FI MOTOR



Wi-Fi TUBULAR MOTOR

DM35F/SW & DM45E/SW

- Electronic Limit
- Switch Direction
- Stall Protection
- Built-in Receiver
- Jog Mode
- Preferred Stop Position



Works with Google Assistant, Amazon Alexa and IFTTT



Smartphone Control (Direct Wi-Fi Connection)



Support motor status feedback



Firmware Update



Support Open/Up, Stop, Close/Down and Precise control



Works with Siri (For iOS12 or above only)



DT72TV/SW & DT72TE/SW

- Electronic Limit
- Stall Protection
- Switch Direction
- Auto Limit Setting
- Manual Override
- Switch Control

WI-FI SWITCH



Wi-Fi Switch DC117C



Works with Google Assistant, Amazon Alexa and IFTTT



Smartphone Control (Direct Wi-Fi Connection)



Works with Siri (For iOS12 or above only)



Firmware Update



External switch control



For standard or interlock wall switch



Output Power: 200W



Working Temperature: -10 °C~ +50°C



2.4GHz Wi-Fi




Dimension: 48mm x 45mm x 23mm

WI-FI RECEIVER



Wi-Fi Receiver DC114S

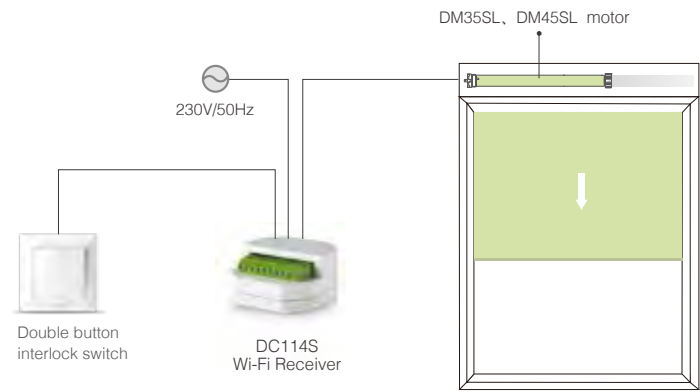

- Works with Google Assistant, Amazon Alexa and IFTTT
- Smartphone Control (Direct Wi-Fi Connection)
- Works with Siri (For iOS12 or above only)
- Firmware Update
-

- One module per motor
- For motor up to 20N.m
- For standard or interlock wall switch
- Output Power: 300W
- Working Temperature: -10 °C~ +50°C
- Radio frequency: 2.4GHz Wi-Fi
- Dimension: 51mm x 51mm x 27mm

RS485 MOTOR



Open serial protocol



RS485 Motor

DM35EQL/J & DM45EQL/J

- RS485 Interface
- Electronic Limit
- Switch Direction
- Stall Protection
- Jog Mode
- Preferred Stop Position
- Memorized Setting
- Built-in Receiver
- Wind-Sun-Rain Sensor Compatible




KNX MOTOR

- ✓ KNX certified and registered
- ⚙️ Flexible control modes
- 📄 Position Feedback
- 🏠 Multi-limit positions



DT300E/SK

- Electronic Limit
- Switching Direction
- Stall Protection
- Built-in Receiver
- Manual Override
- Preferred Stop Position
- Auto Limit Setting



DM45F/SK

- Twisted-pair Medium
- Precise limit setting
- Scan & program
- Preferred stop position
- Memorized setting
- Switch direction
- Stall Protection

Z-WAVE MOTOR



DT82TE/F & DT82TV/F

- Electronic Limit
- Switch Direction
- Stall Protection
- Built-in Receiver
- Manual Override
- Preferred Stop Position
- Auto Limit Setting
- AC Power 100V~240V


Z-Wave Plus S2 certified device



Position feedback



Multi-frequency: 908.42Mhz, 868.42Mhz



Z-Wave Motor

DM35ECB/F & DM45EQ/F

- Electronic Limit
- Switch Direction
- Stall Protection
- Built-in Receiver
- Preferred Stop Position
- Position
- Low-noise
- Jog & Lift Mode



Motorized Roller System

- 37 Ø15 & Ø20 & Ø25 Radio+ Battery Motor
- 40 Ø25 Radio+ Motor With External Battery
- 41 Ø28 Radio+ Battery Motor
- 42 Ø28 Radio+ Motor With External Battery
- 43 Ø35 Radio+ Battery Motor
- 44 Ø35 Radio+ Motor With External Battery
- 45 Ø35 Low-noise Radio+ Motor
- 46 Ø35 Low-noise Electronic Motor
- 47 Ø35 & Ø45 Low-noise Radio+ Motor
- 49 Ø45 Radio+ Battery Motor
- 50 Ø45 Radio+ Motor With External Battery
- 51 Ø45 Low-noise Radio+ Motor
- 52 Ø45 Quiet Electronic Motor



DM15LEU/S



Electronic Limit, Radio+

0.3Nm 30Rpm



Φ15

Suitable for max. fabric size: 4.7m²
(Φ20 tube, bottom beam 1kg, fabric 0.5kg/m²)

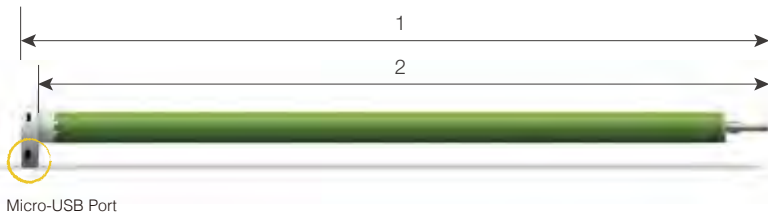

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM15LEU/S	0.3	30	433 ^F	0.6	5	IP20	∞	>6	0°C~40°C	356/349	CE FCC-ID

Features




Micro-USB



Memorized Setting




Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Solar Charging

Control System



Solar Panel DC1288 / DC1288H




Single-channel Emitter DD1600H

Drive Shaft



Limit Head

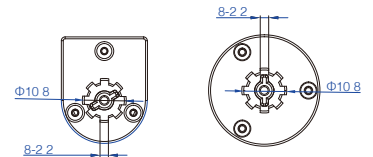



Please scan QR code to watch
3D videos for products
installation and programming

DM20LEU/S Electronic Limit, Radio+ 0.55Nm 38Rpm



Φ20

Suitable for max. fabric size: 4.3m²
(Φ32 tube, bottom beam 1kg, fabric 0.5kg/m²)

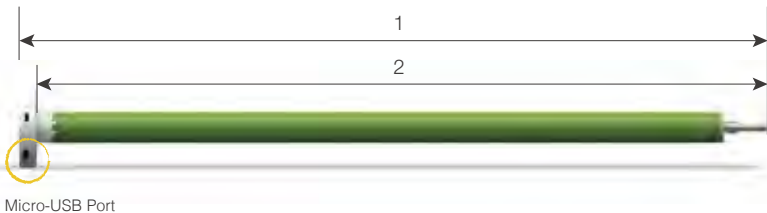

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM20LEU/S	0.55	38	433 [±]	0.7	6	IP20	∞	>6	0°C~40°C	475/463	CE FCC-ID

Features

Micro-USB

Memorized Setting


Status Feedback

Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery

- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Solar Charging



Control System




Drive Shaft



Limit Head



Insect Screen



Motorized Roller Blinds

DM25LEU/S



Electronic Limit, Radio+

1.1Nm 28Rpm



Φ25


Suitable for max. fabric size: 9.6m²
(Φ38 tube, bottom beam 1kg, fabric 0.5kg/m²)

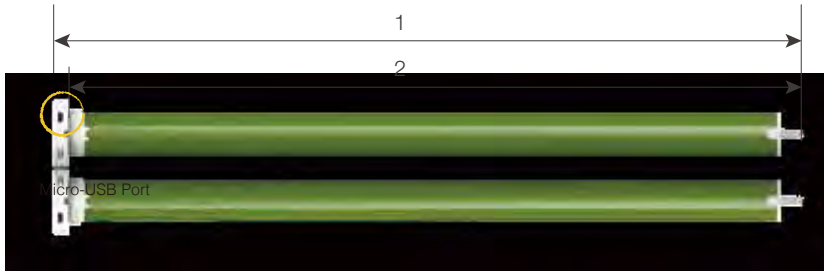

Motorized Roller Blinds

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM25LEU/S	1.1	28	433±	0.94	8	IP20	∞	>6	0°C~40°C	475/463	CE FCC-ID
	1.1	40	433±	0.87	10	IP20	∞	>6	0°C~40°C	550/540	

Features




Micro-USB



Memorized Setting




Solar Charging



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan & Program
- Status Feedback

Control System



Solar Panel DC1288 / DC1288H




Single-channel Emitter DD2700H

Drive Shaft



Limit Head

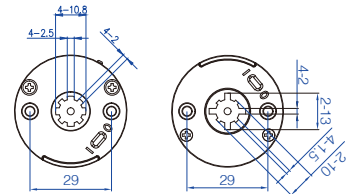



Please scan QR code to watch 3D videos for products installation and programming

DM25CE/S Electronic Limit, Radio+ 0.7Nm 34Rpm



Φ25

Suitable for max. fabric size: 13.8m²
(Φ38 tube, bottom beam 1kg, fabric 0.5kg/m²)

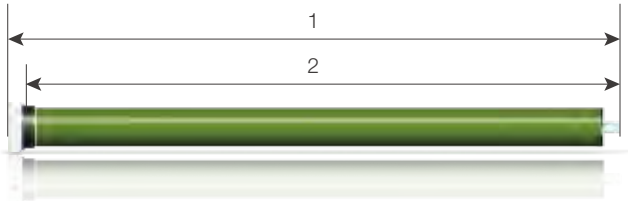

Motorized Roller Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
	0.7	34	433±	0.43	7	IP20	∞	>6	0°C~40°C	296/285	
DM25CE/S	1.1	40	433±	0.83	10	IP20	∞	>6	0°C~40°C	296/285	
	1.5	32	433±	1.00	10	IP20	∞	>6	0°C~40°C	296/285	

Features




Solar Charging



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- External Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Solar Charging

Control System



12V rechargeable battery wand DC1276 & Solar Panel DC1289G





Single-channel Emitter DD1600H

Drive Shaft



Limit Head

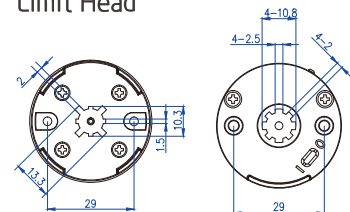

Motorized Roller Blinds

DM28LEU/S



Electronic Limit, Radio+

2Nm 28Rpm



Φ28


Suitable for max. fabric size: 19.1m²
(Φ38 tube, bottom beam 1kg, fabric 0.5kg/m²)

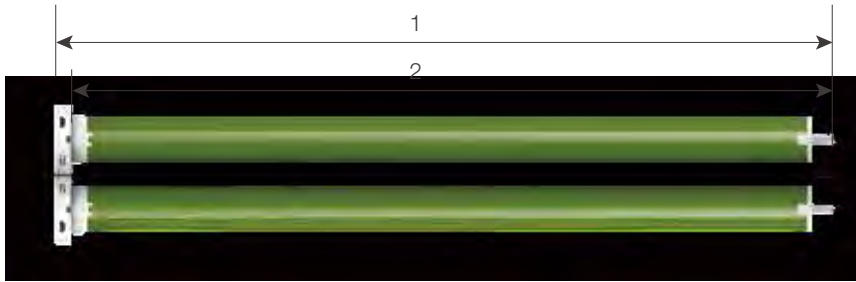

Motorized Roller Blinds

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM28LEU/S	2	28	433 [±]	1.25	15	IP20	∞	>6	0°C~40°C	642/630	CE FCC-ID

Features




Micro-USB



Memorized Setting




Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan & Program
- Status Feedback

Control System



Solar Panel DC1288 / DC1288H




Single-channel Emitter DD1600H

Drive Shaft



Limit Head



Please scan QR code to watch
3D videos for products
installation and programming



DM28CEQ/S

Electronic Limit, Radio+
2Nm 28Rpm



Φ28

Suitable for max. fabric size: 19.1m²
(Φ38 tube, bottom beam 1kg, fabric 0.5kg/m²)

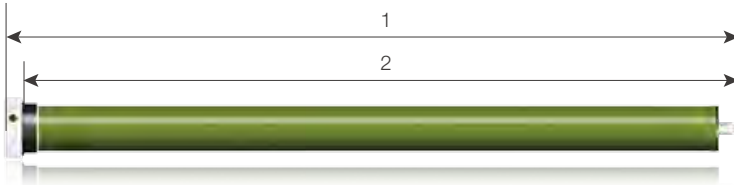

Motorized Roller Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM28CEQ/S	2	28	433 [±]	1.10	13	IP20	∞	>6	0°C~40°C	430/418	CE FCC-ID

Features




Speed Regulation



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Jog & Tilt
- Program Button
- DC Power
- Short Motor
- Radio Lock
- Scene Control
- App Control
- Scan & Program

Control System



12V rechargeable battery wand DC1276
& Solar Panel DC1289G





Single-channel Emitter DD1600H

Drive Shaft



Limit Head





Motorized Roller Blinds

DM35LEU/S

Electronic Limit, Radio+
3Nm 28Rpm




Φ35

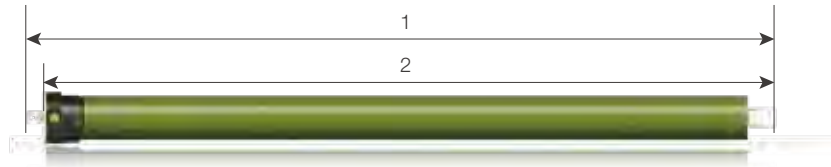

Motorized Roller Blinds

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM35LEU/S	3	28	433 [±]	1.86	21	IP20	∞	>6	0°C~40°C	655/637	CE FCC-ID

Features




Micro-USB



Memorized Setting




Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Status Feedback

Control System



Solar Panel DC1288 / DC1288H





Single-channel Emitter DD1600H

Accessories



DS485

Limit Head





Please scan QR code to watch
3D videos for products
installation and programming

DM35CE/S Electronic Limit, Radio+ 3Nm 28Rpm



Φ35

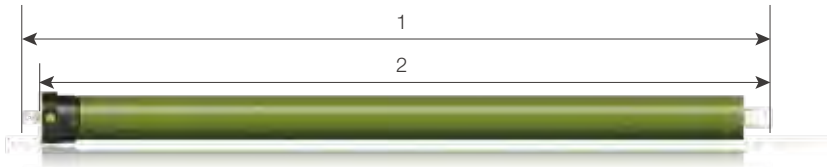

Motorized Roller Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM20LEU/S	3	28	433 ^{±2}	2.20	26	IP20	∞	>6	0°C~40°C	456/441	CE FCC-ID
	10	9	433 ^{±2}	2.20	26	IP20	∞	>6	0°C~40°C	456/441	

Features




Solar Charging



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Solar Charging

Control System



12V rechargeable battery wand DC1276 & Solar Panel DC1289G






Single-channel Emitter DD1600H

Accessories



DS485

Limit Head



Motorized Roller Blinds



DM35RL/S

Mechanic Limit, Radio+

6Nm 28Rpm



Φ35

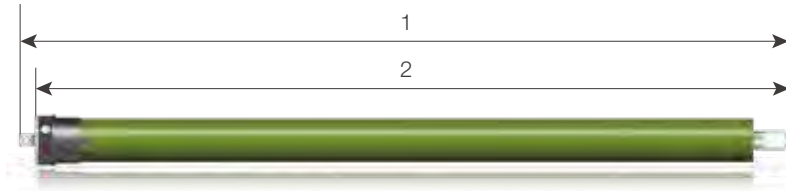


Motorized Roller Blinds




Wooden Venetian Blinds

230V/50Hz 120V/60Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM35RL/S	6	28	433 [±]	0.63	144	IP44	36	>6	0°C~40°C	594/567	


Features



Whisper Operation



Tilt & Lift



Integrated Repeater



Scan & Program

- Mechanic Limit
- Switch Direction
- Built-in Receiver
- Tilt & Lift Mode
- Low-noise
- Scene Control
- Smartphone Control
- Scan and Program

Control System



Portable Single-channel Emitter DD1670H





Single-channel Emitter DD1610H

Accessories



DS485

Limit Head



Please scan QR code to watch 3D videos for products installation and programming



DM35A

Electronic Limit

6Nm 28Rpm



Φ35

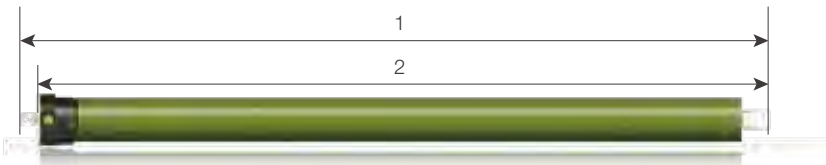

Motorized Roller Blinds



Wooden Venetian Blinds

230V/50Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM35A	6	28	433 [±]	0.53	121	IP44	36	>6	0°C~40°C	583/567	UL US


Features



Electronic Limit



Switch Control



Whisper Operation



Program/Reset Button

- Electronic Limit
- Switch Direction
- Stall Protection
- External Controller
- Program Button
- Parallel Wiring
- Low Noise

Control System



Limit Setting Switch DC270A

Accessories






DZ409A



DS485

Limit Head



Motorized Roller Blinds



Wooden Venetian Blinds



DM35F/S

Electronic Limit, Radio+

6Nm 28Rpm



Φ35

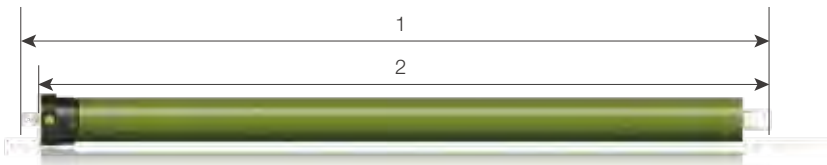

Motorized Roller Blinds

230V/50Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM35F/S	6	28	433 ^{±2}	0.53	121	IP44	36	>6	0°C~40°C	595/552	

Features




Scan & Program



Memorized Setting



Status Feedback



Preferred Stop Position


- Switch Direction
- Stall Protection
- Jog & Tilt
- Program Button
- Radio Lock
- Low Noise
- Scene Control
- Smartphone Control
- Scan & Program
- Integrated Repeater

Control System



Single-channel Emitter DD2710H

Accessories





DZ409A



DS485

Limit Head





Please scan QR code to watch 3D videos for products installation and programming

DM45F/S
Electronic Limit, Radio+
 10Nm 26Rpm



Φ45

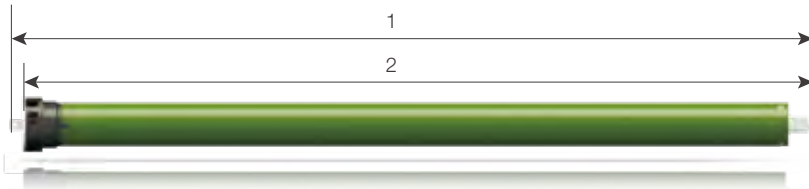

Motorized Roller Blinds

230V/50Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM45F/S	10	26	433 [±]	0.69	161	IP44	∞	>4	-10°C~50°C	616/567	

Features




Scan & Program



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Jog & Tilt
- Program Button
- Radio Lock
- Low Noise
- Scene Control
- Smartphone Control
- Scan & Program
- Integrated Repeater

Control System



Single-channel Emitter DD1800H






Portable Single-channel Emitter DD1850H

Accessories



DS485

Limit Head



Motorized Roller Blinds



DM45LEU/S

Electronic Limit, Radio+

3Nm 28Rpm




Φ45

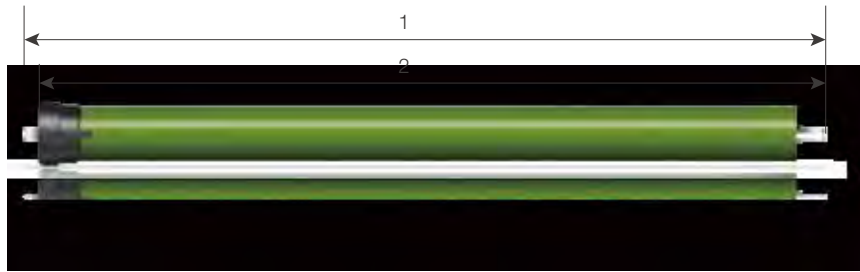

Motorized Roller Blinds

5V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM45LEU/S	3	28	433 ^{±2}	1.86	21	IP20	∞	>6	0°C~40°C	790/777	CE FCC-ID
	10	9	433 ^{±2}	1.86	21	IP20	∞	>6	0°C~40°C	790/777	

Features




Micro-USB



Memorized Setting




Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- Built-in Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan & Program
- Status Feedback

Control System



Solar Panel DC1288 / DC1288H





Single-channel Emitter DD1850H

Accessories



DS485

Limit Head





Please scan QR code to watch
3D videos for products
installation and programming

DM45CE/S
Electronic Limit, Radio+
 20Nm 10Rpm



Φ45

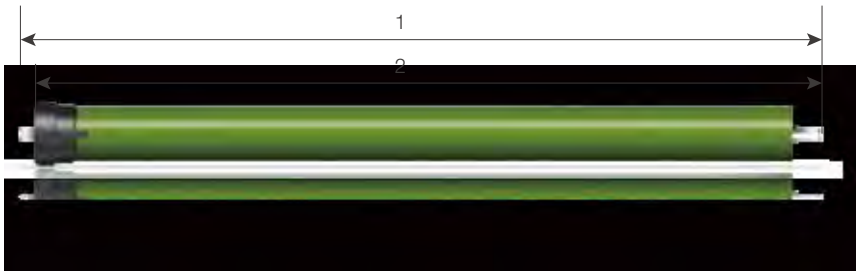

Motorized Roller Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
	3	28	433 [±]	2.20	25	IP20	∞	>6	0°C~40°C	698/670	
DM45CE/S	10	9	433 [±]	2.20	26	IP20	∞	>6	0°C~40°C	690/670	
	20	10	433 [±]	4.10	50	IP20	∞	>6	0°C~40°C	571/552	

Features




Solar Charging



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button
- External Lithium Battery
- Jog Mode
- Scene Control
- Smartphone Control
- Scan and Program
- Solar Charging

Control System



Solar Panel DC1290 & Battery wand DC1276D






Single-channel Emitter DD1600H

Accessories



DS485

Limit Head





Motorized Roller Blinds

DM45RL/S

Mechanic Limit, Radio+
20Nm 26Rpm




Φ45

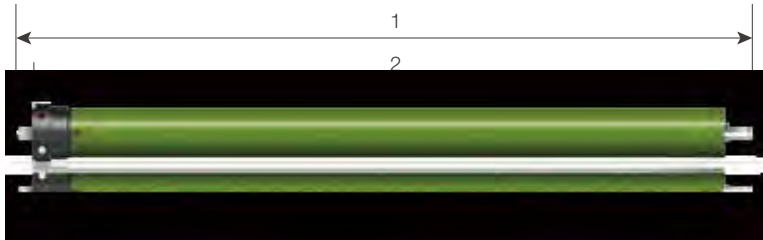

Motorized Roller Blinds

100~240V 50/60Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM40RL/S	10	26	433±	0.64	145	IP44	45	>4	-10°C~50°C	706/657	
	20	26	433±	0.77	170	IP44	45	>4	-10°C~50°C	706/657	

Features




Integrated Repeater



Memorized Setting



Status Feedback



Preferred Stop Position

- Switch Direction
- Stall Protection
- Built-in Receiver
- Program Button

- Jog Mode
- Scene Control
- Smartphone Control
- Scan & Program

Control System



Single-channel Emitter DD1600H





Single-channel Emitter DD1670H

Accessories



DS485

Limit Head



Please scan QR code to watch
3D videos for products
installation and programming



DM45BQ

Electronic Limit

6Nm 28Rpm



Φ45

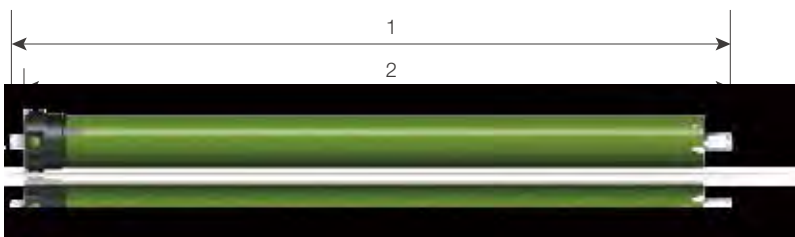

Motorized Roller Blinds

	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
230V/50Hz											
DM45BQ	6	28	433 [±]	0.62	133	IP44	∞	>4	-10°C~50°C	726/667	
	10	17	433 [±]	0.62	133	IP44	∞	>4	-10°C~50°C	726/667	

Features



Electronic Limit



Switch Control



Whisper Operation



Program/Reset Button

- Electronic Limit
- Switch Direction
- Stall Protection
- External Controller
- Program Button
- Parallel Wiring
- Low Noise

Control System



Double button interlock switch






Limit Setting Switch DC270A

Accessories



DS485

Limit Head



Motorized Roller Blinds



04

Motorized Cord-lifting System



- 55 Radio+ motor for 1 inch Venetian
- 57 Radio+ motor for TDBU system
- 58 Radio+ motor for 2 inch wood venetian
- 59 Radio+ Dual-shaft motor for 2 inch Fabric Venetian
- 60 Radio+ tilt-motor for 2 inch wood venetian



DV24AE/S


Electronic Limit, Radio+

0.6Nm 34Rpm

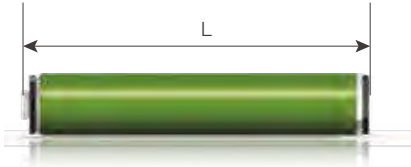

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L (mm)	Certification
DV24AE/S	0.6	34	433 [±]	0.63	8	IP20	∞	>6	0°C~40°C	130	CE

Features



Tilt & Lift



Memorized Setting



Scan & Program



Status Feedback

- Single-Shaft Output
- Switch Direction
- Preferred Stop Position
- Stall Protection
- DC Power Supply, Low Consumption
- Scene Control
- Radio Lock
- Smartphone Control
- Program/Reset Button
- Quick Limit Adjustment

Control System



Solar Panel DC1288




Battery Wand DC1276B



Single-channel Emitter DD1610H

Accessories



DS440



DS440




Please scan QR code to watch 3D videos for products installation and programming

DV24AF/S


Double-Shaft Output, Radio+

0.8Nm 45Rpm



12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L (mm)	Certification
DV24AF/S	0.8	45	433 [±]	0.83	10	IP20	∞	>6	0°C~40°C	202	CE

Features



Tilt & Lift



Speed Regulation



Scan & Program



Status Feedback

- Double-Shaft Output
- Switch Direction
- Preferred Stop Position
- Stall Protection
- DC Power Supply, Low Consumption
- Scene Control
- Radio Lock
- Smartphone Control
- Program/Reset Button
- Quick Limit Adjustment

Control System




12V rechargeable battery wand DC1276 & Solar Panel DC1289G




Single-channel Emitter DD1610H


Accessories




DS440C




DS440D



DS440E



Motorized Honeycomb Blinds





Motorized Venetian Blinds

DV24AF/TD

Electronic Limit, Radio+


2x0.6Nm 30Rpm

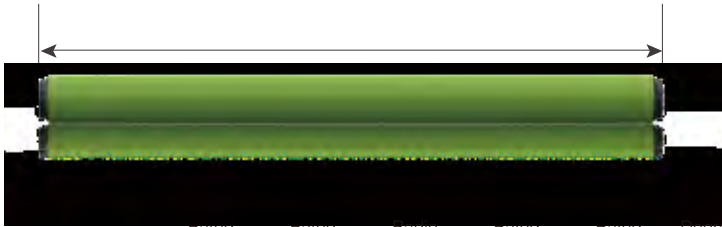

Motorized TDBU Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L (mm)	Certification
DV24AF/TD	2x0.6	30	433±	2.28	28	IP20	∞	>6	0°C~40°C	320	CE

Features



Tilt & Lift



Memorized Setting







Scan & Program



Status Feedback

- Electronic Limit
- Built-in Receiver
- Jog Mode
- Preferred Stop Position
- Stall Protection
- Scene Control
- Radio Lock
- Smartphone Control
- Program/Reset Button
- Quick Limit Adjustment

4 Modes



Control System




15-channel LCD Emitter DD1662HD




Charge Adaptor DC731E


Accessories



DS440C



DS440D



DS440E



Please scan QR code to watch 3D videos for products installation and programming


DM35RL/S

Mechanic Limit, Radio+

6Nm 28Rpm




Φ35

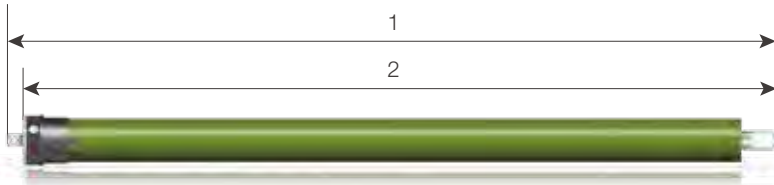


Wooden Venetian Blinds

230V/50Hz	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DM35RL/S	6	28	433 ^{±2}	0.63	144	IP44	36	>6	0°C~40°C	594/567	cULUS

Features



Whisper Operation



Tilt & Lift



Integrated Repeater



Scan & Program


- Mechanic Limit
- Switch Direction
- Built-in Receiver
- Tilt & Lift Mode
- Low-noise
- Scene Control
- Smartphone Control
- Scan and Program

Control System




Single-channel Emitter DD1610H

Accessories






Crown DH36




Drive Adaptor DL44

Limit Head



Motorized TDBU Blinds




Motorized Venetian Blinds

DV40AF/S

Electronic Limit, Radio+

2x1Nm 28Rpm

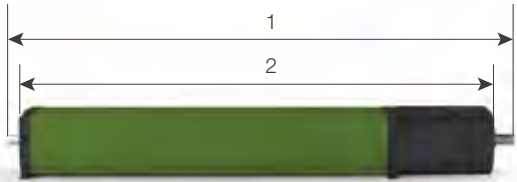

Motorized Venetian Blinds

12V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L1/L2 (mm)	Certification
DV40AF/S	2x1	28	433 ^{±2}	1.7	20	IP20	∞	>6	0°C~40°C	320/308	CE


Features



Scan & Program



Memorized Setting



Status Feedback



External Battery Powered

- Built-in Receiver
- Dual Shaft
- Jog & Lift
- Preferred Stop Position
- Low Power Consumption
- Scene Control
- Radio Lock
- Smartphone Control
- Stall Protection
- Program/Reset Button

Control System



Solar Panel DC1289G



Rechargeable battery wand DC1276



Single-channel Emitter DD1812H

Accessories



DS478A 6mmx6



DS478B 6mmx4




Please scan QR code to watch 3D videos for products installation and programming

DV50CA/S

Electronic Limit, Radio+

0.6Nm 10Rpm



Motorized Wooden Venetian Blinds

8.4V	Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Length L (mm)	Certification
DV50CA/S	0.6	10	433 ^{MHz}	0.5	4	IP20	∞	>6	0°C~40°C	103	

Features



Easy Installation



Switch Wand Control



External Battery Powered

- Switch Direction
- Tilt Only
- Preferred Stop Position
- Stall Protection
- Program/Reset Button
- Scene Control
- Radio Lock
- Smartphone Control
- Stall Protection
- Program/Reset Button

Control System



Single-channel Emitter DD2712H

Accessories



DC800E-P



DC800E-K




DS841



DS842



DS843



Motorized Venetian Blinds

Motorized Curtain Track

- 63 Radio+ Horizontal mounting curtain motor
- 64 Radio+ Multi-feature Curtain motor
- 69 Track & Accessories B#
- 71 Radio+ motor for Vertical blinds
- 72 Radio+ Tilt-motor for Vertical blinds
- 73 Radio+ Brush-less motor for Vertical blinds
- 74 Vertical Blinds Accessories




DT980TV/S

Horizontal Mounting, Radio+
Stop/Run by pulling fabric
1.2Nm 14cm




100-240V 50/60Hz	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Lim t Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DT980TV/S	1.2	14	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	CE

Features



Stall Protection



Vertical Or Horizontal Mounting



Scan & Program


- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Preferred Stop Position
- Program/Reset Button
- Dry Contact Input
- Electronic Limit
- Switch Direction
- Built-in Receiver
- Auto Limit Setting
- Manual Override
- Stop/Run By Pulling Fabric

Control System




15-channel LCD Emitter DD1662HA

MOUNTING DIMENSIONS
Double Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



MOUNTING DIMENSIONS
Single Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



Please scan QR code to watch
3D videos for products
installation and programming


DT980LE/S

Battery Powered, Radio+
Horizontal Mounting
1.2Nm 20cm




14.8V	Rated Torque (Nm)	Running Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DT980LE-1.2/20	1.2	20	433 ±	1	16	IP20	∞	>4	0°C~40°C	50	CE

Features



Stall Protection



Manual Override



Pluggable Lithium Battery Pack


- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Preferred Stop Position
- Program/Reset Button
- Solar Charging
- Electronic Limit
- Switch Direction
- Built-in Receiver
- Auto Limit Setting
- Scan & Program
- Stop/Run By Pulling Fabric
- Dry Contact Input

Control System




15-channel LCD Emitter DD1662HA

MOUNTING DIMENSIONS
Double Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



MOUNTING DIMENSIONS
Single Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



Motorized Curtain Track


DT82TN/S

AC (100V~240V), Radio+
Multi-interface
1.2Nm 14cm



100-240V 50/60Hz	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Lim t Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DT82TN	1.2	14	433 ±	0.14	13	IP20	∞	>4	0°C~40°C	50	CE

Features



Stall Protection



Scan & Program





Vertical Or Horizontal Mounting

- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Preferred Stop Position
- Program/Reset Button
- Dry Contact Input
- Electronic Limit
- Switch Direction
- Built-in Receiver
- Auto Limit Setting
- Manual Override
- Stop/Run By Pulling Fabric

Control System



15-channel Emitter DD1862HA



Please scan QR code to watch
3D videos for products
installation and programming

DT82TV/S

AC (100V~240V), Radio+
Multi-interface, Hotel Module
1.2Nm 14cm



100-240V 50/60Hz	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DT82TV/S	1.2	14	433	0.14	13	IP20	∞	>4	0°C~40°C	50	CE


Features



Whisper Operation



Third Party Interface






Integrated Repeater

- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Scan & Program
- Program/Reset Button
- Preferred Stop Position
- Switch Direction
- Stall Protection
- Built-in Receiver
- Auto Limit Setting
- Manual Override
- Stop/Run By Pulling Fabric
- Dry Contact Input

Control System



Single-channel Emitter DD2762HA



Motorized Curtain Track


DT72LE/S

Horizontal Mounting, Radio+
Stop/Run by pulling fabric
1.2Nm 20cm



14.8V	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DT72LE/S	1.2	20	433	1.10	16	IP20	∞	>4	0°C~40°C	50	CE

Features



Stall Protection



Scan & Program



Pluggable Lithium Battery Pack

- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Preferred Stop Position
- Program/Reset Button
- Solar Charging
- Electronic Limit
- Switch Direction
- Built-in Receiver
- Auto Limit Setting
- Manual Override
- Stop/Run By Pulling Fabric
- Dry Contact Input

Control System




15-channel Emitter DD1660HA




Solar Panel DC1289C

MOUNTING DIMENSIONS
Double Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



MOUNTING DIMENSIONS
Single Track Motorized Curtain
Curtain Box Reserved
Minimum Dimension



Please scan QR code to watch
3D videos for products
installation and programming


DT72TV/S

Battery Powered, Radio+
Horizontal Mounting
1.2Nm 14cm



14.8V	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Cert fication
DT72TV/S	1.2	14	433±	0.16	16	IP20	∞	>4	0°C~40°C	50	CE


Features



Stall Protection



Scan & Program





Third Party Interface

- Scene Control
- Radio Lock
- Status Feedback
- Smartphone Control
- Preferred Stop Position
- Program/Reset Button
- Dry Contact Input
- Electronic Limit
- Switch Direction
- Built-in Receiver
- Auto Limit Setting
- Manual Override
- Stop/Run By Pulling Fabric









Control System



Single-channel Emitter DD1860HA










Motorized Curtain Track

Product Picture	Product Name	Item No	Description
	Curtain Motor	Refer To P.168	Refer To P.168
	Guide Track (B#Track)	DS157B-01	Aluminum Alloy, Electrophoresis Processing Surface Thickness: 2.1mm , 0.58kg/m Buy According To The Length (Unit: Meter)
	Rubber Belt	DS157-07D	Green(Imported) Maximum Load: 100kg Buy According To The Length (Unit: meter) Remind: Each 1m Track Required 2m Belts
	Connecting Kit	DS157-17 ----- DS157B-09	Powder Coating Surface+stainless Steel(Thickness 2.2mm) 1 set/track
	End Box (For DT980)	DS157-00AK-12 ----- DS157-00AK-12A ----- DS157-00AL-13	DS157-00AK-12 x 1pcs (Right) DS157-00AK-12A x 1pcs (Left) DS157-00AL-13 x 1pcs
	End Box (For DT72)	DS157B-00G-08 ----- DS157B-00G-03	1pcs / set ----- 1pcs / set
	End Box (For DT52)	DS157B-15-00 ----- DS157B-14-00	1pcs / set ----- 1pcs / set
	End Box	DS157B-00G-08A	1pcs / set

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.


B# Track & Accessories

Product Picture	Product Name	tem No	Description
	Ceiling Bracket II	DS157B-11A	3 pcs/m(Track More), Add 2 pcs For 1 Meter Track Select No.5 or No.6
	Quiet Runner	DS157B-07BA	8 pcs/m (Track)
	Master Carrier	DS157B-26	Stainless Center: 2 pcs/set Side: 1 piece/set
	End Hook	DS157-04	2pcs / set
	Belt Fastening Button	DS157B-10	Stainless center: 4pcs / set Side: 2pcs / set
	Bumper	DS157B-04D	Standard runner 2 pcs / set (track)
	Sponge	DS157-12	For bumper 2 pcs/set

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.


DK30DE/S

Electronic Limit, Radio+
DC Jog Motor
15Nm 6cm

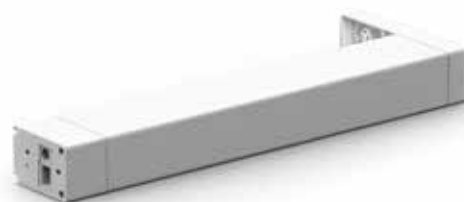


12V	Rated Torque (Nm)	Running Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DK30DE/S	15	6	433	0.66	8	IP20	∞	>4	0°C~40°C	10	


Features



Stall Protection



Jog & Tilt Mode



RS485 Control

- Electronic Limit
- Switch Direction
- Built-in Receiver
- Elegant Operation
- RS485 Interface
- DC Power Supply
- Pluggable Power Cable
- Jog & Tilt



Control System



15-channel Emitter DD1610H



Charge Adaptor DC731E



Please scan QR code to watch
3D videos for products
installation and programming

DK30LE/S & DK30NE/S

Electronic Limit, Radio+
DC Jog Motor
0.1Nm 15Rpm



6V/8V	Rated Torque (Nm)	Rated Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
DK30LE/S	8V 0.1	15	433	0.4	3	IP40	∞	>4	0°C~40°C	10	CE
DK30NE/S	6V 0.1	15	433	0.4	3	IP40	∞	>4	0°C~40°C	10	

Features



Jog & Tilt Mode

Moving Open & Close

Jog & Tilt



Easy Installation



Scan & Program

- Electronic Limit
- Switch Direction
- Built-in Receiver
- Stall Protection
- DC Power Supply
- External Battery with Quick Plug
- Lithium battery or AA battery



Control System



Single-channel Emitter DD2710H



Pluggable Lithium Battery Pack



Motorized Vertical Blinds


DK40WTE/S & DK40MTE/S

Electronic Limit, AC 100V~240V
0.3Nm 10cm/s




12V	Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Length L (mm)	Cert fication
DK40WTE/S	0.3	10	433 ±	0.15	8	IP20	>4	0°C~40°C	10	442	CE
DK40MTE/S	0.3	10	433 ±	0.15	8	IP20	>4	0°C~40°C	10	442	

Features



Stall Protection



Left or Right Mounting





Speed Regulation

- Radio Lock
- Status Feedback
- Smartphone Control
- Scan & Program
- Speed Regulation
- Switch Direction
- Built-in Receiver
- Whisper Operation
- RS485 Interface
- Brushless Motor System

Control System



15-channel LCD Emitter DD1612H

















Please scan QR code to watch
3D videos for products
installation and programming



Motorized Vertical Blinds

Motorized Vertical Blinds Accessories

Product Picture	Product Name	Description	Product Picture	Product Name	Description
	Track DS368-13	Aluminium Alloy 6063-T5 Based On Measurement L-37mm		Spacer DS368-08	POM 1 pcs/8cm
	Driving Rod (right) DS368-22	Aluminium Alloy 6069 Based On Measurement L-44mm		Runners Components DS368-24	Combination 1 pcs/8cm
	Driving Rod (left) DS368-22A	Aluminium Alloy 6069 Based On Measurement L-44mm		Active Rolling Ball Assembly(Right) DS368-25	Combination 1 pcs
	Cross Shape Driving Rod DS368-23	Aluminium Alloy 6069 Based On Measurement L-44mm		Active Rolling Ball Assembly(left) DS368-25A	Combination 1 pcs
	Ceiling Bracket (motor) DZ384	Stainless Steel 1 pcs <i>(optional)</i>		Wall Bracket (guide rail) DZ385A	Combination 2 pcs/m(optional)
	Ceiling Bracket (guide rail) DZ384A	Stainless Steel 1 pcs/m <i>(optional)</i>		End Cap DS368-14	ABS 1 pcs
	Wall Bracket (motor) DZ385	Stainless Steel 1 pcs <i>(optional)</i>		Internal Cap DS368-15	POM 1 pcs

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



DODYA

Control System

119	Emitters
141	Receivers
153	Switches
155	Switch Converter
156	Repeaters
157	Battery Pack & Solar Panel
160	Dry Contact To Radio
161	Group Controllers



CONTROL SYSTEM EMITTERS



DD1600H
Single-channel Emitter

- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1602H
15-channel LCD Emitter

- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1603H
Single-channel Timer Emitter

- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1605H
5-channel Timer Emitter

- Regular timer mode
- Random / Vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1610H
Single-channel Emitter

- With tilt buttons
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1612H
15-channel LCD Emitter

- With tilt buttons
- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1660HA
Single-channel
Dual Control Emitter

- For motorized curtain
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1662HA
15 - channel Dual
Control LCD Em tter

- For motorized curtain
- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1663HA
Single - channel Dual
Control Timer Em tter

- For motorized curtain
- Regular timer mode
- Random / Vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1665HA
5 - channel Dual
Control Timer Em tter

- For motorized curtain
- Regular timer mode
- Random / Vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1662HD
15 - channel
Dual Control Emitter

- For TDBU blinds
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1609H
15 - channel Ed table Emitter

- Editable channel name
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm

CONTROL SYSTEM EMITTERS



DD1520H

15-channel Emitter

- Battery powered, wall-mounted
- Battery: 2 x 1.5V batteries (AAA)
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 104mm×44.6mm×25mm



DD1522H

15 - channel Emitter

- Battery powered, wall-mounted
- Battery: 2 x 1.5V batteries (AAA)
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 104mm×44.6mm×25mm



DD1530H

Single-channel Dual Control Emitter

- Battery powered, wall-mounted
- Battery: 2 x 1.5V batteries (AAA)
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 104mm×44.6mm×25mm



DD6010H

Portable 5 - channel Emitter

- US wall plate
- Individual and group control
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 66mm×30.9mm×11mm



DD1670H
Portable Single- channel Emitter

- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1671H
Portable Dual Channel Emitter

- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1670HA *curtain motor*
Portable Single-channel Emitter

- For motorized curtain
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1671HA *curtain motor*
Portable Dual Channel Emitter

- For motorized curtain
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1673H
Portable 15-channel Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1675H
Portable Single-channel Timer Emitter

- Battery powered, wall-mounted
- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1673HA *curtain motor*
Portable 15-channel Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD1676H
Portable 5-channel Timer Emitter

- Battery powered, wall-mounted
- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm

EXQUISITE DESIGN

DD1800 SERIES REMOTE CONTROLLER





CONTROL SYSTEM EMITTERS



DD1800H
Single-channel Emitter

- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1802H
15-channel LCD Emitter

- Freely adjustable Max. channels
- Maximum 15 channel
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1803H
Single-channel Timer Emitter

- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1805H
5-channel Timer Emitter

- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1810H
Single-channel Emitter

- With tilt buttons
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1812H
15-channel LCD Emitter

- With tilt buttons
- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD1850H

Portable Single-channel
Emitter

- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 86mm×86mm×11.7mm



DD1853H

Portable 15-channel
Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 86mm×86mm×11.7mm



DD1850HA

Portable Single-channel
Emitter

- For motorized curtain
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 86mm×86mm×11.7mm



DD1853HA

Portable
15-channel Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 86mm×86mm×11.7mm



DD1862H

15-channel
Dual Control Emitter

- For TDBU blinds
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1860HA

Single-channel
Dual Control Emitter

- For motorized curtain
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD1862HA

15-channel Dual
Control LCD Emitter

- For motorized curtain
- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm

CONTROL WITH EASE

DD2700 SERIES REMOTE CONTROLLER





CONTROL SYSTEM EMITTERS



DD2700H
Single - channel Emitter

- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×45mm×11.5mm



DD2702H
15 - channel Emitter

- Freely adjustable Max. channels
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×45mm×11.5mm



DD2703H
Single - channel Timer Emitter

- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension: 130mm×45mm×11.5mm



DD2705H
5 - channel Timer Emitter

- Regular timer mode
- Random/vacation timer mode
- Manual timer mode
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×44mm×10.5mm



DD2710H
Single - channel Emitter

- With tit buttons
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×45mm×11.5mm



DD2712H
15 - channel LCD Emitter

- Freely adjustable Max. channels
- With tit buttons
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature:
-10°C ~ +50°C
- Dimension:
130mm×45mm×11.5mm



DD2770H
Portable Single-channel Emitter

- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD2773H
Portable 15 - channel Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD2770HA *curtain motor*
Portable Single-channel Emitter

- For motorized curtain
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



DD2773HA *curtain motor*
Portable 15 - channel Emitter

- Freely adjustable Max. channels
- Battery powered, wall-mounted
- Battery: 3V, CR2430
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 80mm×80mm×11.7mm



curtain motor
DD2760HA
Single - channel
Dual Control Emitter

- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



curtain motor
DD2762HA
Single - channel
Dual Control Emitter

- For motorized curtain
- Battery: 3V CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm



DD2762HD
15 - channel LCD Emitter


- For TDBU blinds
- Battery: 3V, CR2450
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +50°C
- Dimension: 130mm×44mm×10.5mm

CONTROL SYSTEM

RECEIVERS




DD1690H
Single-channel
Wall-mounted Receiver

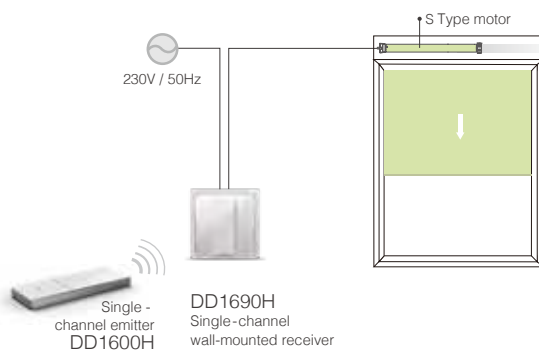

- Control motor up to 50N.m
- Jog mode (Tilt for venetian)
- Working temperature: -10°C ~ +50°C
- Work with all Dooya Emitters
- Radio frequency: 433.92MHz
- Pair and store up to 20 em tters
- Compatible with European wall-box
- Dimension: 80mmx80mm




DD1692H
Single-channel
Wall-mounted Timer Receiver

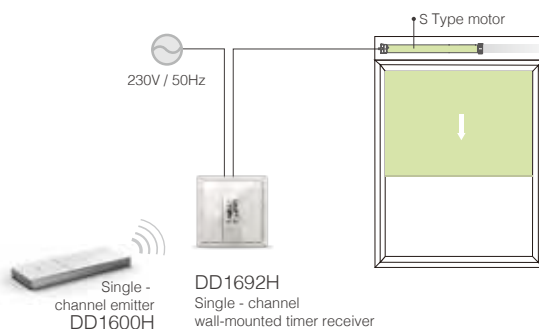

- One motor per receiver 
- For motor up to 50N.m
- Fixed and random timer a ternative
- Jog mode (Tilt for venetian)
- Radio frequency: 433.92MHz
- Work with all Dooya Emitters
- Pair and store up to 20 em tters
- Compatible with European wall-box
- Working temperature: -10°C ~ +50°C
- Dimension: 80mmx80mm




DD1880H
Single - channel
Wall-mounted Receiver

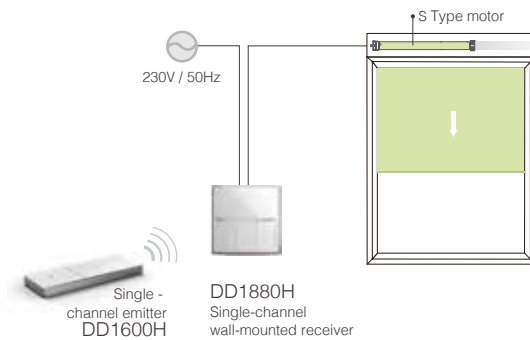

- Max 50N m tubular motor
- With light - touch switch function
- Jog mode, tilt for venetian blinds
- Can match all DOOYA wireless emitters
- Can store 20 channels
- Can be installed inside European wall-box
- Working temperature: -10°C ~ +50°C
- Dimension: 86mmx86mm



DD1881H
Double - channel
Wall-mounted Receiver

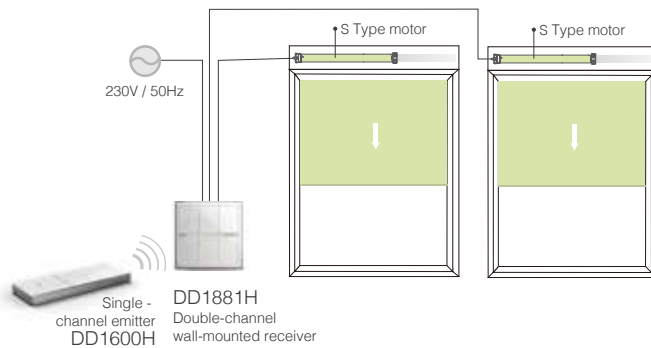


- Max 50N m tubular motor
- With light-touch switch function
- Jog mode, tilt for venetian blinds
- Can match all DOOYA wireless emitters
- Can store 20 channels
- Can be installed inside European wall-box
- Working temperature: -10°C ~ +50°C
- Dimension: 86mmx86mm

CONTROL SYSTEM RECEIVERS



DD1686H
DC Single - channel Receiver

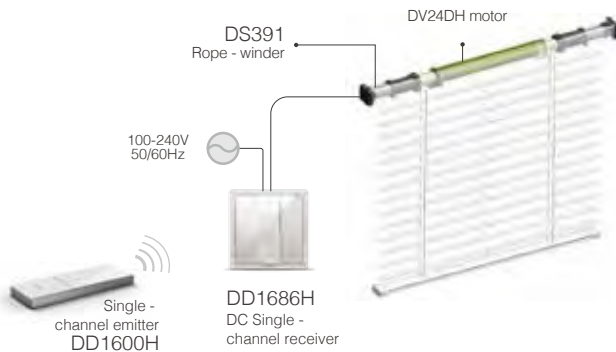

- Max 1.5Nm DC motor
- Jog mode
- Quick reverse; Stall protection, radio control
- Radio frequency: 433.92MHz
- Maximum output power: 30W
- Input voltage: 100~240V
- Output voltage: 12V/24V
- Dimension: 86mm×86mm



DD1686H
DC Single - channel receiver

- Max 1.5Nm DC motor
- Jog Mode
- Quick Reverse
- Stall protection, radio control
- Radio frequency: 433.92MHz
- Maximum output power: 10W
- Input voltage: 100~240V
- Output voltage: 12/24V
- Dimension: 86mm×86mm



DD1686HA
DC Single - channel receiver

- Max 1.5Nm DC motor
- External switch
- Jog mode
- Quick reverse
- Stall protection, radio control
- Compatible with dry contact
- Radio frequency: 433.92MHz
- Maximum output power: 30W
- Input voltage: 100~240V
- Output voltage: 24V
- Dimension: 86mm×86mm



DD1338H
4 - channel Receiver

- Max. 4 channels output
- Jog mode
- Quick reverse
- Stall protection, Radio control
- Radio frequency: 433.92MHz
- Maximum output power: 96W
- Input voltage: 100-240V
- Output voltage: 24V/4A
- Dimension: 86mmx172mm



DD1338H
4 - channel receiver

230V / 50Hz




Single - channel
emitter
DD1610H

CONTROL SYSTEM RECEIVERS




DD30H
Receiver

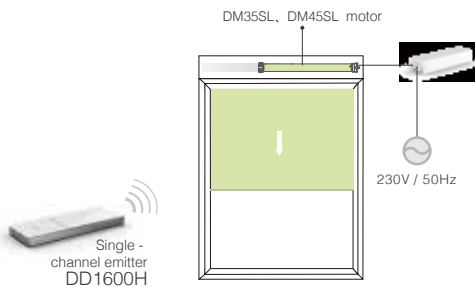

- One receiver per motor
- For motor up to 120N m
- Work with all Dooya emitters
- Pair and store up to 20 emitters
- Input / Output Voltage: 230V
- Power Output: 500W
- Radio frequency: 433.92MHz
- Working Temperature: -10°C ~ +55°C
- Dimension: 100mm x 27mm x 40.5mm



DD177H
Receiver With
Lighting Control

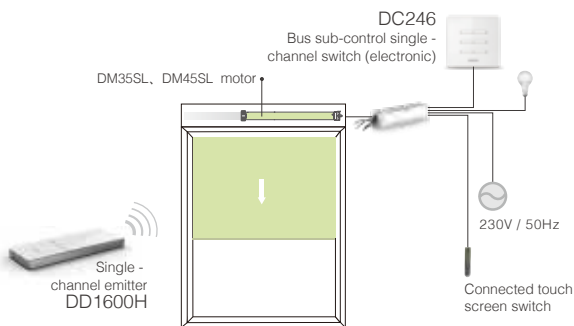

- One receiver per motor
- For motor up to 120N m
- Light control output up to 100W
- Compatible with multiple wall switch input
- Dry contact input
- External lead program button
- Jog mode (tilt for venetian)
- Work with all Dooya emitters
- Pair and store up to 20 emitters
- Input / Output voltage: 230V
- Power output: 600W
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +55°C
- Dimension: 100mm x 27mm x 40.5mm



DD117
Switch Module

- One receiver per lamp
- For standard or interlock wall switch
- Output Power: 120W
- Working Temperature: -10°C ~ +50°C
- Radio frequency: 433.92MHz
- Work with all Dooya emitters
- Pair and store up to 20 emitters
- Dimension: 48mm x 45mm x 23mm




DD117C
Single - channel
Wireless Receiver

- One receiver per motor
- For motor up to 50N m
- For standard or interlock wall switch
- Sensitive stall detection (by current)
- Percentage control
- Output power: 300W
- Pair and store up to 20 emitters
- Dimension: 48mm x 45mm x 23mm




DD117H
Single - channel
Wireless Receiver


- One receiver per motor
- For motor up to 50N m
- For standard or interlock wall switch
- Jog mode (tilt for venetian)
- Output Power: 300W
- Radio frequency: 433.92MHz
- Work with all Dooya emitters
- Dimension: 48mm x 45mm x 23mm

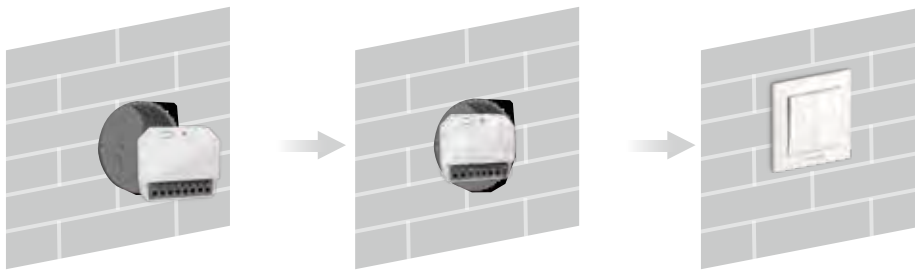


European Installation Method 80mmx80mm

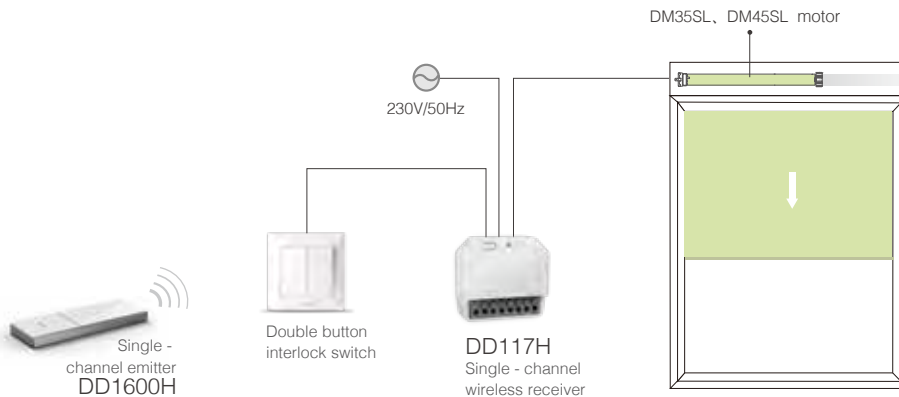

CONTROL SYSTEM RECEIVERS

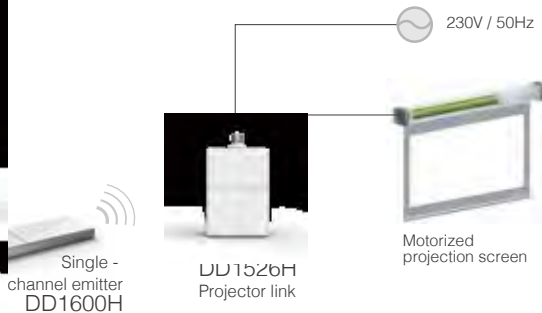

- Maximum projector power: 1000W
- Auto-detect projector power status
- Radio Frequency: 433.92MHz
- Rated voltage: 230V/50Hz
- Working temperature: -10°C ~ 50°C

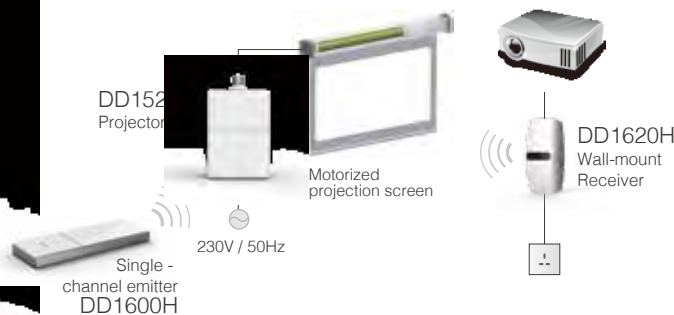


- Photo-cell input
- One receiver per motor
- Compatible with DOOYA emitters
- Pair and store up to 20 emitters
- Additional IR receiver
- Radio Frequency: 433.92MHz
- Rated voltage: 230V/50Hz
- Working temperature: -10°C ~ 50°C



DD1146H
DC Receiver




Single -
channel emitter
DD1600H



- Dry Contact input
- Pair and store up to 20 emitters
- Work with all DOOYA emitters
- Input / Output voltage: 12V
- Output power: 150W
- Radio frequency: 433.92MHz
- Working temperature: -10°C ~ +55°C
- Dimension: 100mmx27mmx40.5mm



DD1141H
DC Receiver

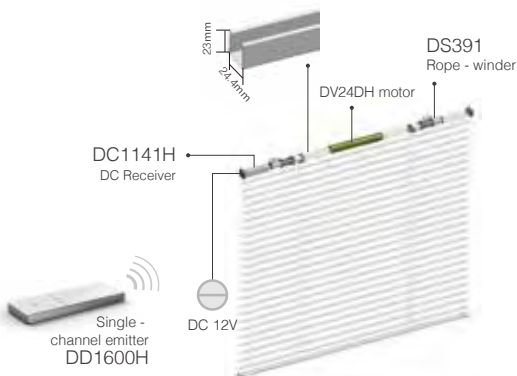

- Jog mode
- Concealed mounting in headrail
- Stall Detection
- Work with all DOOYA emitters
- Pair and store up to 20 emitters
- Radio frequency: 433.92MHz
- Input / Working voltage: 12V
- Output power: 36W
- Dimension: 25mm x 20mm x 114mm

CONTROL SYSTEM

SWITCHES / REPEATER



DC2600
Single - channel
Pushbutton Switch

- Tempered glass and UV covered button
- Max 100 N.m tubular motor
- Working temperature: -20°C ~ +55°C
- Dimension: 86mmx86mm



DC2601
Double Button
Interlock Switch

- Tempered glass and UV covered button
- Max 100 N.m tubular motor
- Working temperature: -20°C ~ +55°C
- Dimension: 86mmx86mm



DC2602
Double Button
Pushbutton Switch

- Tempered glass and UV covered button
- Max 100 N.m tubular motor
- Working temperature: -20°C ~ +55°C
- Dimension: 86mmx86mm



DC2601A
Double Button
Interlock Switch

- Tempered glass and UV covered button
- Max 100 N.m tubular motor
- Working temperature: -20°C ~ +55°C
- Dimension: 86mmx86mm




DC2602A
Double Button
Pushbutton Switch

- Tempered glass and UV covered button
- Max 100 N.m tubular motor
- Working temperature: -20°C ~ +55°C
- Dimension: 86mmx86mm




DC1156
Switch Converter

- Dry contact input & DC power out
- Compatible with mechanic switch
- Jog & tilt
- Rated power: 30W
- Rated voltage: 24V

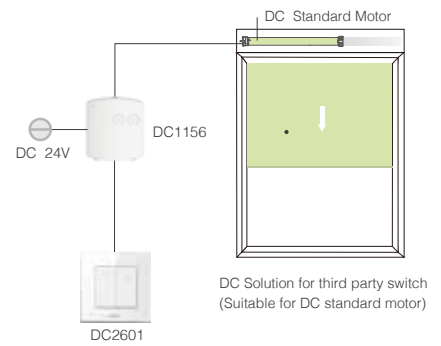

DD1557H
Repeater

- Input voltage: USB DC5V
- Radio Frequency: 433.925MHz
- Working current: ≤20mA
- Working temperature:
-5°C ~ 50°C

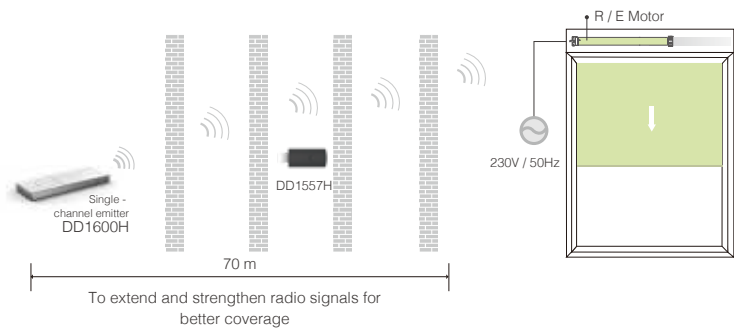

BATTERY PACK & SOLAR PANEL



DC1276
12V Rechargeable Battery Wand

- For all DOOYA DC motor(<12V,20W)
- Power: 11.1V 2.6Ah
- Working life: 600 times
- Dimension: 225mm×27.5mm×27.5mm




DC1289H
Solar Panel

- Output voltage: 12.6V 35135 charging
- Output power: 3W
- Working temperature: 0°C ~ +50°C
- Service life: 5 years
- Dimension: 475mm×52mm×11mm



DC1288H / DC1288I
Solar Panel


- Output voltage: 5V USB charging
- Output power: 3W
- Working temperature: 0°C ~ +50°C
- Service life: 5 years
- Dimension: 475mm×52mm×11mm

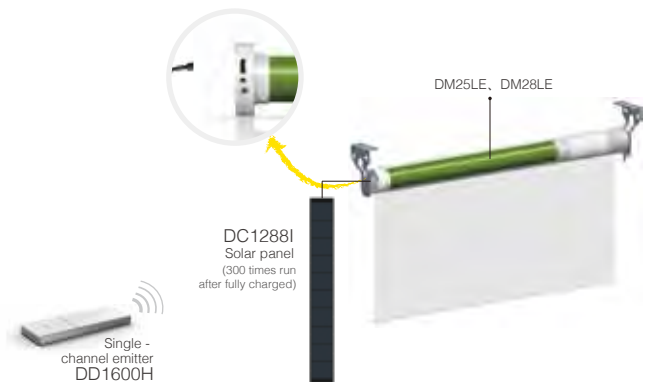




DC1290
Long - strip Solar Panel

- Output voltage: 12.6V
- Service life: 5 years
- Output power: 5W
- Working temperature: 0°C ~ +50°C
- Dimension: 530mm×57mm×6mm

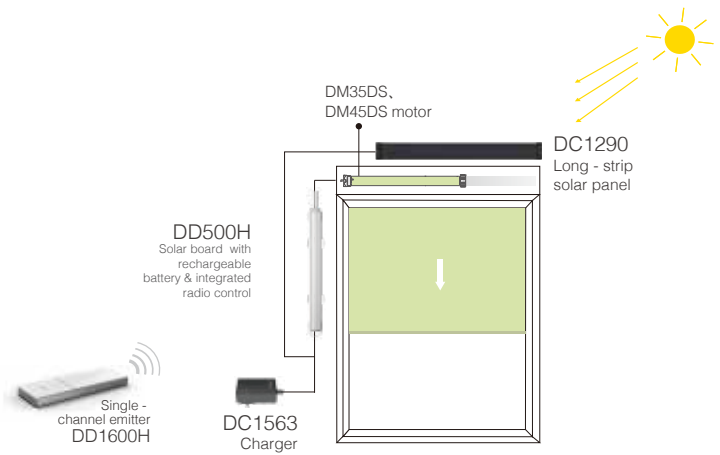

DC1289G
Long - strip Solar Panel

- Output voltage: 12.6V
- Service life: 5 years
- Output power: 5W
- Working temperature: 0°C ~ +50°C
- Dimension: 560mm×65mm×4mm

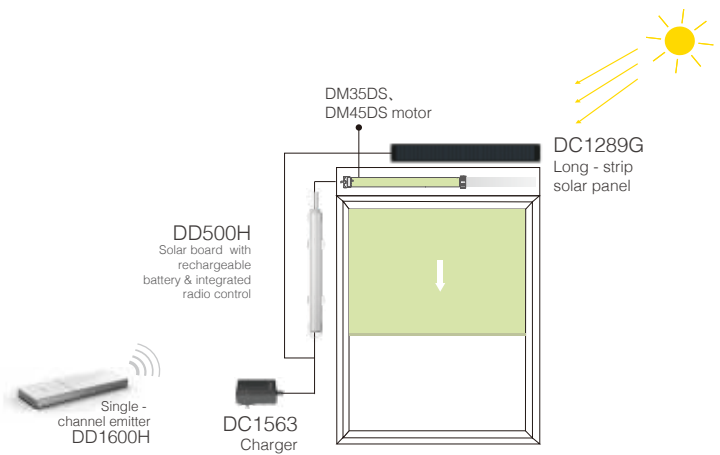



CONTROL SYSTEM

DRY CONTACT TO RADIO




DD1149H
Dry Contact To Radio

- Connect with external mains voltage or dry-contact switch
- Radio Range: 200 meters outdoor, 35 meters indoor
- Power supply: 12V/ 24V
- Transmitting Frequency: 433.92MHz ± 100KHz
- Working temperature: -10°C ~ +50°C

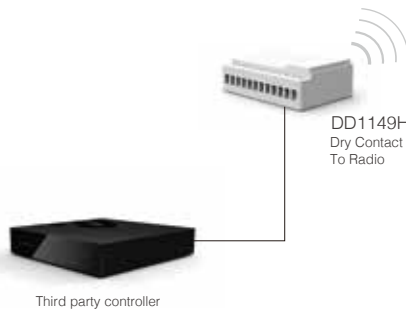

DC550
8 - channel group controller

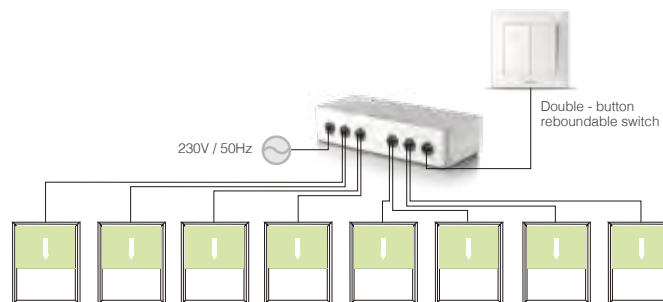

- DC550 is a 8 - channel group controller, which can be used for indoor roller blinds, indoor Venetian blinds, indoor wooden Venetian blinds, hollow aluminum Venetian blinds, indoor honeycomb blinds / pleated blinds, indoor sheer blinds and indoor Roman blinds
- Can control 8 AC motors at the same time
- Match all mechanic switches
- Match all motors without integrated radio control
- Working temperature -20°C ~ +55°C
- Dimension 260mm x 111mm x 57mm

Optional Controller



DC80
4 - channel group controller

- Max 60N mx4 units tubular motors



DC173
2 - channel group controller

- Specialized outdoor water - proof group controller
- Max 60N mx2 units tubular motors



DC134
4 - channel group controller

- Specialized outdoor water - proof group controller
- Max 60N mx2 units tubular motors



DC509
4 - channel group controller

- Max 60N mx2 units tubular motors



DC516
4 - channel group controller

- Max 60N mx3 units tubular motors



DC517
3 - channel group controller



- Max 60N mx4 units tubular motors

CONTROL SYSTEM GROUP CONTROLLERS



DC209
Group Controller

- Can connect 200 units of motors and switches in series
- Can match all mechanic switches
- Can match all motors without built - in radio function
- Bus control & sub-bus control
- Working temperature -20°C ~ +55°C
- Dimension 52mm X 52mm X 22mm

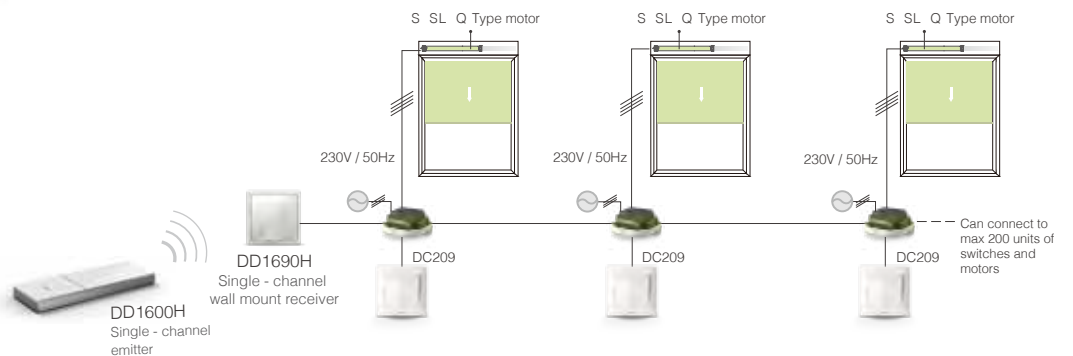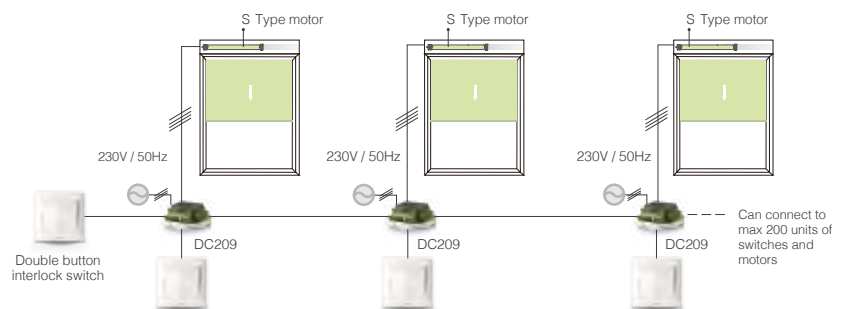



07

Product Parameter

- 165 DV Series
- 167 DT Series
- 169 DK Series
- 170 DS/DB Series
- 171 LE/LEU Series
- 172 CE/TE Series
- 173 S Series
- 174 Q Series
- 175 R Series
- 177 B Series
- 179 E Series



PRODUCT PARAMETER



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L (mm)	Certification
12V												
DV24AE (Φ24)	DV24AE-0.6/34	0.6	34	433≐	0.63	8	IP20	∞	>6	0°C~40°C	130	CE
DV24AF (Φ24)	DV24AF-0.8/45	0.8	45	433≐	0.83	10	IP20	∞	>6	0°C~40°C	202	
	DV24AF/TD-2×0.6/34	2×0.6	34	433≐	1.50	18	IP20	∞	>6	0°C~40°C	320	
DV24CE (Φ24)	DV24CE-0.6/34	0.6	34	433≐	0.57	7	IP20	∞	>6	0°C~40°C	130	
	DV24CE-0.6/45	0.6	45	433≐	0.51	6	IP20	∞	>6	0°C~40°C	130	
DV24CF (Φ24)	DV24CF-0.8/45	0.8	45	433≐	1.20	12	IP20	∞	>6	0°C~40°C	193	
DV24DH/L (Φ24)	DV24DH-0.8/45	0.8	45	/	0.67	8	IP20	90	>6	0°C~40°C	193	
DV24JB (Φ24)	DV24JB-0.6/34	0.6	34	/	0.51	6	IP20	∞	>6	0°C~40°C	130	
24V												
DV16DS (Φ16)	DV16DS-0.3/50	0.3	50	/	0.13	3	IP20	/	>6	-10°C~60°C	109	CE
DV18DS (Φ18)	DV18DS-0.3/34	0.3	34	/	0.14	4	IP20	/	>6	-10°C~60°C	88	
DV24DG (Φ24)	DV24DG-0.6/45	0.6	45	/	0.3	7	IP20	90	>6	-10°C~60°C	104	
DV24DH/L (Φ24)	DV24DH-0.8/45	0.8	45	/	0.4	10	IP20	90	>6	0°C~40°C	193	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L (mm)	Certification
6V												
DV33NE/S	DV33NE/S-0.2/30	0.2	30	433≐	0.27	2	IP20	/	>6	0°C~40°C	205	CE



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L (mm)	Certification
12V												
DV40CF	DV40CF-2x1/28	2x1	28	433≐	1.70	20	IP20	∞	>6	0°C~40°C	320	CE
	DV40CF-2x2/18	2x2	28	433≐	2.00	26	IP20	∞	>6	0°C~40°C	320	

24V

DV40DF	DV40DF-2x1/28	2x1	28	433≐	0.80	18	IP20	∞	>6	0°C~40°C	320	CE
	DV40DF-2x2/18	2x2	18	433≐	1.10	26	IP20	∞	>6	0°C~40°C	333	



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L (mm)	Certification	
8.4V													
DV50CA/S	DV50CA/S-0.6/10	0.6	10	433≐	0.50	4	IP20	∞	>6	0°C~40°C	103	CE Industry Canada FCC-ID	
12V													
DV50CA/S	DV50CA/S-0.6/10	0.6	10	433≐	0.50	6	IP20	∞	>6	0°C~40°C	103		
DV50CE/S	DV50CE/S-0.6/10	0.6	10	433≐	0.58	7	IP20	∞	>6	0°C~40°C	92		

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.

PRODUCT PARAMETER



		Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
100-240V 50/60Hz												
DT12TV	DT12TV-1.2/14	1.2	14	433≠	0.15	16	IP20	∞	>4	0°C~40°C	50	

230V/50Hz

DT12E	DT12E-45/20	0.8	20	433≠	0.23	45	IP20	∞	>4	0°C~40°C	50	
	DT12E-75/20	1.2	20	433≠	0.34	75	IP20	∞	>4	0°C~40°C	100	



		Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
100-240V 50/60Hz												
DT72	DT72TS-1.2/14	1.2	14	/	0.14	13	IP20	∞	>4	0°C~40°C	50	
	DT72TV-1.2/14	1.2	14	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	
	DT72TV/P-1.2/14	1.2	14	433≠	0.14	13	IP20	∞	>4	0°C~40°C	50	
	DT72TV/S-1.2/14	1.2	14	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	

14.8V

DT72LE	DT72LE-1.2/20	1.2	20	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	
--------	---------------	-----	----	------	------	----	------	---	----	----------	----	--

230V/50Hz

DT72EV	DT72EV-45/20	0.8	20	433≠	0.23	45	IP20	∞	>4	0°C~40°C	50	
	DT72EV-75/20	1.2	20	433≠	0.34	75	IP20	∞	>4	0°C~40°C	100	



		Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
230V/50Hz												
DT52	DT52S-45/20	0.8	20	/	0.23	45	IP20	∞	>4	0°C~40°C	50	
	DT52S-75/20	1.2	20	/	0.34	75	IP20	∞	>4	0°C~40°C	100	
	DT52EN-45/20	0.8	20	433≠	0.23	45	IP20	∞	>4	0°C~40°C	50	
	DT52EN-75/20	1.2	20	433≠	0.34	75	IP20	∞	>4	0°C~40°C	100	



		Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
100-240V 50/60Hz												
DT82	DT82TS-1.2/14	1.2	14	/	0.14	10	IP20	∞	>4	0°C~40°C	50	
	DT82TV-1.2/14	1.2	14	433≠	0.14	13	IP20	∞	>4	0°C~40°C	50	
	DT82TV/P-1.2/14	1.2	14	433≠	0.14	13	IP20	∞	>4	0°C~40°C	50	
	DT82TF-1.2/14	1.2	14	433≠	0.14	13	IP20	∞	>4	0°C~40°C	50	
	DT82TN-1.2/14	1.2	14	433≠	0.14	13	IP20	∞	>4	0°C~40°C	50	

14.8V

DT82	DT82LE-1.2/20	1.2	20	433≠	1.10	16	IP20	∞	>4	0°C~40°C	50	
	DT82LF-1.2/20	1.2	20	433≠	1.10	16	IP20	∞	>4	0°C~40°C	50	



		Rated Torque (Nm)	Runing Speed (cm/s)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	Maximum Load (kg)	Certification
100-240V 50/60Hz												
DT980	DT980TV-1.2/14	1.2	14	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	
	DT980TF-1.2/14	1.2	14	433≠	0.16	16	IP20	∞	>4	0°C~40°C	50	

14.8V

DT980	DT980LE-1.2/20	1.2	20	433≠	1.00	16	IP20	∞	>4	0°C~40°C	50	
	DT980LF-1.2/20	1.2	20	433≠	1.00	16	IP20	∞	>4	0°C~40°C	50	


Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.

PRODUCT PARAMETER



		Rated Torque (N)	Runing Speed	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Running Time (min)	Working Temperature (°C)	L1 (mm)	Certification
12V											
DK30	DK30DE-15/6	15	6cm/s	433⇌	0.66	8	IP20	>4	0°C~40°C	275	CE
7.4V											
DK30	DK30LE-0.15/15	0.15	15 rpm	433⇌	0.83	5	IP20	>4	0°C~40°C	275	CE
6V											
DK30	DK30NE-0.15/15	0.15	15 rpm	433⇌	0.83	5	IP20	>4	0°C~40°C	275	CE
100-240V 50/60Hz											
DK40	DK40MTE-0.3/10	0.3	10	433⇌	0.15	8	IP20	>4	0°C~40°C	442	CE
	DK40WTE-0.3/10	0.3	10	433⇌	0.15	8	IP20	>4	0°C~40°C	442	


Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
12V											
DM25DS (Φ25)	DM25DS-0.7/34	0.7	34	0.55	8	IP20	25	>6	0°C~40°C	277/266	CE
	DM25DS-1/32	1	32	0.58	7	IP20	25	>6	0°C~40°C	311/301	
24V											
DM25DS (Φ25)	DM25DS-1/32	1	32	0.38	9	IP20	25	>6	0°C~40°C	311/301	CE
DM25DB (Φ25)	DM25DB-0.1/270	0.1	270	0.74	18	IP20	∞	>6	0°C~40°C	304/284	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.

PRODUCT PARAMETER

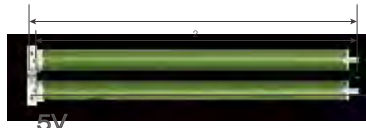

		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
5V												
DM15LEU (Φ15)	DM15LEU-0.3/30	0.3	30	433±	0.60	5	IP20	∞	>6	0°C~40°C	356/349	
DM20LEU (Φ20)	DM20LEU-0.55/38	0.55	38	433±	0.70	6	IP20	∞	>6	0°C~40°C	475/463	
DM25LEU (Φ25)	DM25LEU-1.1/28	1.1	28	433±	0.94	8	IP20	∞	>6	0°C~40°C	475/463	
	DM25LEU-1.1/40	1.1	40	433±	0.87	10	IP20	∞	>6	0°C~40°C	550/540	
DM28LEU (Φ28)	DM28LEU-2/28	2	28	433±	1.25	15	IP20	∞	>6	0°C~40°C	642/630	
DM35LEU (Φ35)	DM35LEU-3/28	3	28	433±	1.86	21	IP20	∞	>6	0°C~40°C	655/637	
	DM35LEU-10/9	10	9	433±	1.86	21	IP20	∞	>6	0°C~40°C	655/637	
DM45LEU (Φ45)	DM45LEU-3/28	3	28	433±	1.86	21	IP20	∞	>6	0°C~40°C	790/777	
	DM45LEU-10/9	10	9	433±	1.86	21	IP20	∞	>6	0°C~40°C	790/777	
8V												
DM25LE (Φ25)	DM25LE/L-0.7/34	0.7	34	433±	1.00	8	IP20	∞	>6	0°C~40°C	503/491	
12V												
DM25LE (Φ25)	DM25LE-1.1/40	1.1	40	433±	0.87	10	IP20	∞	>6	0°C~40°C	503/491	
DM28LE (Φ28)	DM28LEQ-2/28	2	28	433±	1.10	13	IP20	∞	>6	0°C~40°C	642/630	
DM35LE (Φ35)	DM35LE-3/28	3	28	433±	2.20	26	IP20	∞	>6	0°C~40°C	654/637	
DM45LE (Φ45)	DM45LEQ-3/28	3	28	433±	2.10	25	IP20	∞	>6	0°C~40°C	812/793	
	DM45LEQ-10/9	10	9	433±	2.20	26	IP20	∞	>6	0°C~40°C	812/793	
	DM45LE-20/10	20	10	433±	4.10	50	IP20	∞	>6	0°C~40°C	812/793	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
--	--	-------------------	-------------------	-----------------------	-------------------	-----------------	---------------------------	---------------------------	--------------------	--------------------------	------------	---------------

12V

DM25CE (Φ25)	DM25CE/S-0.7/34	0.7	34	433±	0.43	7	IP20	∞	>6	0°C~40°C	296/285	
	DM25CE/S-1.1/40	1.1	40	433±	0.83	10	IP20	∞	>6	0°C~40°C	296/285	
	DM25CE/S-1.5/32	1.5	32	433±	1.00	10	IP20	∞	>6	0°C~40°C	296/285	
DM28CEQ (Φ28)	DM28CEQ-2/28	2	28	433±	1.10	13	IP20	∞	>6	0°C~40°C	430/418	
DM35CE (Φ35)	DM35CE-3/28	3	28	433±	2.20	26	IP20	∞	>6	0°C~40°C	456/441	
	DM35CE-10/9	10	9	433±	2.20	26	IP20	∞	>6	0°C~40°C	456/441	
DM45CEQ (Φ45)	DM45CEQ-3/28	3	28	433±	2.20	25	IP20	∞	>6	0°C~40°C	698/670	
	DM45CEQ-10/9	10	9	433±	2.20	26	IP20	∞	>6	0°C~40°C	698/670	
	DM45CEQ-20/10	20	10	433±	4.10	50	IP20	∞	>6	0°C~40°C	571/552	

100-240V 50/60Hz

DM25TE (Φ25)	DM25TE-0.7/34	0.7	34	433±	0.09	10	IP20	∞	>6	0°C~40°C	433/421	
	DM25TE-1.5/32	1.5	32	433±	0.15	13	IP20	∞	>6	0°C~40°C	443/431	
DM28TEQ (Φ28)	DM28TEQ-2/28	2	28	433±	0.16	18	IP20	∞	>6	0°C~40°C	643/631	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.

PRODUCT PARAMETER



		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
230V / 50Hz											
DM35S (Φ35)	DM35S-6/28	6	28	0.53	121	IP44	36	>4	-10°C~50°C	445/417	
	DM35S-10/17	10	17	0.53	121	IP44	36	>4	-10°C~50°C	445/417	
	DM35S-13/14	13	14	0.53	121	IP44	36	>4	-10°C~50°C	445/417	
DM35SL (Φ35)	DM35SL-6/28	6	28	0.67	144	IP44	36	>4	-10°C~50°C	514/487	
	DM35SL-10/17	10	17	0.67	144	IP44	36	>4	-10°C~50°C	514/487	
DM35SD (Φ35)	DM35SD-10/17	10	17	0.53	121	IP44	36	>4	-10°C~50°C	395/368	
DM45S (Φ45)	DM45S-10/26	10	26	0.64	145	IP44	45	>4	-10°C~50°C	455/444	
	DM45S-20/26	20	26	0.77	170	IP44	45	>4	-10°C~50°C	525/514	
	DM45S-30/15	30	15	0.83	191	IP44	45	>4	-10°C~50°C	525/514	
DM45SL (Φ45)	DM45SL-10/26	10	26	0.64	145	IP44	45	>4	-10°C~50°C	561/517	
	DM45SL-20/26	20	26	0.77	170	IP44	45	>4	-10°C~50°C	591/547	
DM45SD (Φ45)	DM45SD-10/15	10	15	0.49	112	IP44	45	>4	-10°C~50°C	351/322	
	DM45SD-20/15	20	15	0.64	145	IP44	45	>4	-10°C~50°C	366/337	
120V / 60Hz											
DM35S (Φ35)	DM35S-6/33	6	33	0.97	113	IP44	36	>4	-10°C~50°C	474/447	
	DM35S-10/21	10	21	1.00	121	IP44	36	>4	-10°C~50°C	474/447	
	DM35S-13/15	13	15	1.00	121	IP44	36	>4	-10°C~50°C	474/447	
DM35SL (Φ35)	DM35SL-6/33	6	33	0.85	102	IP44	36	>4	-10°C~50°C	513/468	
	DM35SL-10/21	10	21	1.00	121	IP44	36	>4	-10°C~50°C	513/468	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
120V / 60Hz											
DM45S (Φ45)	DM45S-10/32	10	32	1.17	140	IP44	45	>4	-10°C~50°C	515/484	ROHS cULUS
	DM45S-20/32	20	32	1.59	208	IP44	45	>4	-10°C~50°C	545/524	
DM45SL (Φ45)	DM45SL-10/32	10	32	1.17	140	IP44	45	>4	-10°C~50°C	515/484	
	DM45SL-20/32	20	32	1.70	200	IP44	45	>4	-10°C~50°C	566/534	




		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
230V / 50Hz											
DM35Q (Φ35)	DM35Q-4/28	4	28	0.57	133	IP44	36	>4	-10°C~50°C	550/535	TUV CE
	DM35Q-6/20	6	20	0.57	133	IP44	36	>4	-10°C~50°C	550/535	
	DM35Q-8/15	8	15	0.57	133	IP44	36	>4	-10°C~50°C	550/535	
DM45Q (Φ45)	DM45Q-6/28	6	28	0.53	121	IP44	36	>4	-10°C~50°C	645/624	
	DM45Q-10/17	10	17	0.53	121	IP44	36	>4	-10°C~50°C	645/624	

		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
120V / 60Hz											
DM35Q (Φ35)	DM35Q-4/33	4	33	0.78	102	IP44	36	>4	-10°C~50°C	550/535	cULUS
	DM35Q-6/24	6	24	0.78	102	IP44	36	>4	-10°C~50°C	550/535	
DM45Q (Φ45)	DM45Q-6/33	6	33	0.85	102	IP44	36	>4	-10°C~50°C	645/624	
	DM45Q-10/21	10	21	1.00	121	IP44	36	>4	-10°C~50°C	645/624	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.


PRODUCT PARAMETER



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
230V / 50Hz												
DM35R (Φ35)	DM35R-6/28	6	28	433±	0.53	121	IP44	36	>4	-10°C~50°C	594/567	 CE
	DM35R-10/17	10	17	433±	0.53	121	IP44	36	>4	-10°C~50°C	594/567	
	DM35R-13/14	13	14	433±	0.53	121	IP44	36	>4	-10°C~50°C	594/567	
DM35RL (Φ35)	DM35RL-6/28	6	28	433±	0.63	144	IP44	36	>4	-10°C~50°C	594/567	
	DM35RL-10/17	10	17	433±	0.63	144	IP44	36	>4	-10°C~50°C	594/567	
DM35RQ (Φ35)	DM35RQ-4/28	4	28	433±	0.57	133	IP44	36	>4	-10°C~50°C	613/587	
	DM35RQ-6/20	6	20	433±	0.57	133	IP44	36	>4	-10°C~50°C	613/587	
	DM35RQ-8/15	8	17	433±	0.57	133	IP44	36	>4	-10°C~50°C	613/587	
DM45R (Φ45)	DM45R-10/26	10	26	433±	0.64	145	IP44	45	>4	-10°C~50°C	612/582	
	DM45R-20/26	20	26	433±	0.77	170	IP44	45	>4	-10°C~50°C	632/513	
	DM45R-30/15	30	15	433±	0.83	191	IP44	45	>4	-10°C~50°C	632/613	
DM45RL (Φ45)	DM45RL-10/26	10	26	433±	0.64	145	IP44	45	>4	-10°C~50°C	706/657	
	DM45RL-20/26	20	26	433±	0.77	170	IP44	45	>4	-10°C~50°C	706/657	
DM45RQ (Φ45)	DM45RQ-6/28	6	28	433±	0.57	133	IP44	45	>4	-10°C~50°C	826/777	
	DM45RQ-10/17	10	17	433±	0.57	133	IP44	45	>4	-10°C~50°C	826/777	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.




		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
120V / 60Hz												
DM35R (Φ35)	DM35R-6/33	6	33	433 [±]	0.85	102	IP44	36	>4	-10°C~50°C	583/567	
	DM35R-10/21	10	21	433 [±]	1.00	121	IP44	36	>4	-10°C~50°C	583/567	
	DM35R-13/15	13	15	433 [±]	1.00	121	IP44	36	>4	-10°C~50°C	583/567	
DM35RL (Φ35)	DM35RL-6/33	6	33	433 [±]	0.85	102	IP44	36	>4	-10°C~50°C	594/552	
	DM35RL-10/21	10	21	433 [±]	0.99	119	IP44	36	>4	-10°C~50°C	594/552	
DM35RQ (Φ35)	DM35RQ-4/33	4	33	433 [±]	0.85	102	IP44	36	>4	-10°C~50°C	614/587	
	DM35RQ-6/24	6	24	433 [±]	0.85	102	IP44	36	>4	-10°C~50°C	614/587	
	DM35RQ-8/17	8	17	433 [±]	0.85	102	IP44	36	>4	-10°C~50°C	614/587	
DM45R (Φ45)	DM45R-10/32	10	32	433 [±]	1.23	148	IP44	45	>4	-10°C~50°C	645/624	
	DM45R-20/32	20	32	433 [±]	1.60	208	IP44	45	>4	-10°C~50°C	685/664	
DM45RL (Φ45)	DM45RL-10/32	10	32	433 [±]	1.23	148	IP44	45	>4	-10°C~50°C	666/634	
	DM45RL-20/32	20	32	433 [±]	1.60	208	IP44	45	>4	-10°C~50°C	706/674	
DM45RQ (Φ45)	DM45RQ-6/33	6	33	433 [±]	0.87	104	IP44	45	>4	-10°C~50°C	826/794	
	DM45RQ-10/21	10	21	433 [±]	1.00	121	IP44	45	>4	-10°C~50°C	826/794	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.


PRODUCT PARAMETER



		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
230V / 50Hz											
DM35B (Φ35)	DM35B-6/28	6	28	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35B-10/17	10	17	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35B-13/14	13	14	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
DM35BQ (Φ35)	DM35BQ-4/28	4	28	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
	DM35BQ-6/20	6	20	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
	DM35BQ-8/15	8	15	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
DM35A (Φ35)	DM35A-6/28	6	28	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35A-10/17	10	17	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
DM45B (Φ45)	DM45B-10/26	10	26	0.69	161	IP44	∞	>4	-10°C~50°C	506/494	
	DM45B-20/26	20	26	0.90	205	IP44	∞	>4	-10°C~50°C	576/564	
	DM45B-30/15	30	15	0.87	200	IP44	∞	>4	-10°C~50°C	582/563	
DM45BH (Φ45)	DM45BH-10/15	10	15	0.48	113	IP44	∞	>4	-10°C~50°C	394/369	
DM45BQ (Φ45)	DM45BQ-6/28	6	28	0.62	133	IP44	∞	>4	-10°C~50°C	726/667	
	DM45BQ-10/17	10	17	0.62	133	IP44	∞	>4	-10°C~50°C	726/667	
DM45A (Φ45)	DM45A-10/26	10	26	0.69	161	IP44	∞	>4	-10°C~50°C	506/494	
	DM45A-20/26	20	26	0.90	205	IP44	∞	>4	-10°C~50°C	576/564	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.





		Rated Torque (Nm)	Rated Speed (Rpm)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
120V / 60Hz											
DM35B (Φ35)	DM35B-6/33	6	33	0.85	102	IP44	∞	>4	-10°C~50°C	583/567	
	DM35B-10/21	10	21	1.00	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35B-13/15	13	15	1.00	121	IP44	∞	>4	-10°C~50°C	583/567	
DM35BQ (Φ35)	DM35BQ-4/33	4	33	0.78	102	IP44	∞	>4	-10°C~50°C	583/567	
	DM35BQ-6/24	6	24	0.78	102	IP44	∞	>4	-10°C~50°C	583/567	
	DM35BQ-8/17	8	17	0.78	102	IP44	∞	>4	-10°C~50°C	583/567	
DM35A (Φ35)	DM35A-6/33	6	33	0.85	102	IP44	∞	>4	-10°C~50°C	583/567	
	DM35A-10/21	10	21	1.00	121	IP44	∞	>4	-10°C~50°C	583/567	
DM45B (Φ45)	DM45B-10/32	10	32	1.23	148	IP44	∞	>4	-10°C~50°C	556/544	
	DM45B-20/32	20	32	1.60	208	IP44	∞	>4	-10°C~50°C	596/584	
DM45BQ (Φ45)	DM45BQ-6/33	6	33	0.87	104	IP44	∞	>4	-10°C~50°C	826/794	
	DM45BQ-10/21	10	21	1.00	121	IP44	∞	>4	-10°C~50°C	826/794	
DM45A (Φ45)	DM45A-10/32	10	32	1.17	140	IP44	∞	>4	-10°C~50°C	716/683	
	DM45A-20/32	20	32	1.59	208	IP44	∞	>4	-10°C~50°C	716/683	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.


PRODUCT PARAMETER




		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
230V / 50Hz												
DM35E (Φ35)	DM35E-6/28	6	28	433±	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	 
	DM35E-10/17	10	17	433±	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35E-13/14	13	14	433±	0.53	121	IP44	∞	>4	-10°C~50°C	583/567	
DM35EQ (Φ35)	DM35EQ-4/28	4	28	433±	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
	DM35EQ-6/20	6	20	433±	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
	DM35EQ-8/15	8	15	433±	0.57	133	IP44	∞	>4	-10°C~50°C	565/522	
DM35F (Φ35)	DM35F-6/28	6	28	433±	0.53	121	IP44	∞	>4	-10°C~50°C	595/552	
	DM35F-10/17	10	17	433±	0.53	121	IP44	∞	>4	-10°C~50°C	595/552	
DM45E (Φ45)	DM45E-10/26	10	26	433±	0.69	161	IP44	∞	>4	-10°C~50°C	602/583	
	DM45E-20/26	20	26	433±	0.90	205	IP44	∞	>4	-10°C~50°C	645/624	
	DM45E-30/15	30	15	433±	0.87	200	IP44	∞	>4	-10°C~50°C	652/633	
DM45EQ (Φ45)	DM45EQ-6/28	6	28	433±	0.53	121	IP44	∞	>4	-10°C~50°C	716/684	
	DM45EQ-10/17	10	17	433±	0.53	121	IP44	∞	>4	-10°C~50°C	716/684	
DM45EZ (Φ45)	DM45EZ-10/15	10	15	433±	0.48	113	IP44	∞	>4	-10°C~50°C	394/369	
DM45F (Φ45)	DM45F-10/26	10	26	433±	0.69	161	IP44	∞	>4	-10°C~50°C	616/567	
	DM45F-20/26	20	26	433±	0.90	205	IP44	∞	>4	-10°C~50°C	666/617	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



		Rated Torque (Nm)	Rated Speed (Rpm)	Radio Frequency (MHz)	Rated Current (A)	Rated Power (W)	Degree Of Protection (IP)	Maximum Limit Turn (turn)	Running Time (min)	Working Temperature (°C)	L1/L2 (mm)	Certification
120V / 60Hz												
DM35E (Φ35)	DM35E-6/33	6	33	433±	0.85	102	IP44	∞	>4	-10°C~50°C	583/567	
	DM35E-10/21	10	21	433±	1.00	121	IP44	∞	>4	-10°C~50°C	583/567	
	DM35E-13/15	13	15	433±	1.00	121	IP44	∞	>4	-10°C~50°C	583/567	
DM35EQ (Φ35)	DM35EQ-4/33	4	33	433±	0.78	102	IP44	∞	>4	-10°C~50°C	565/522	
	DM35EQ-6/24	6	24	433±	0.78	102	IP44	∞	>4	-10°C~50°C	565/522	
	DM35EQ-8/17	8	17	433±	0.78	102	IP44	∞	>4	-10°C~50°C	565/522	
DM35F (Φ35)	DM35F-6/33	6	33	433±	0.85	102	IP44	∞	>4	-10°C~50°C	595/522	
	DM35F-10/21	10	21	433±	1.00	121	IP44	∞	>4	-10°C~50°C	595/522	
DM45E (Φ45)	DM45E-10/32	10	32	433±	1.23	148	IP44	∞	>4	-10°C~50°C	666/584	
	DM45E-20/32	20	32	433±	1.60	208	IP44	∞	>4	-10°C~50°C	666/617	
DM45EQ (Φ45)	DM45EQ-6/33	6	33	433±	0.87	104	IP44	∞	>4	-10°C~50°C	759/734	
	DM45EQ-10/21	10	21	433±	1.00	121	IP44	∞	>4	-10°C~50°C	759/734	
DM45F (Φ45)	DM45F-10/32	10	32	433±	1.17	140	IP44	∞	>4	-10°C~50°C	616/567	
	DM45F-20/32	20	32	433±	1.70	200	IP44	∞	>4	-10°C~50°C	666/617	

Note: Above-listed are common information for reference. Please consult Dooya export team for technical details or customization specs.



08 Motor Accessories

- 123 Tube & Accessories
- 125 Crown & Adaptor
- 129 Tube Identifier
- 130 Wall Mount Bracket
- 131 Check-n Bracket
- 132 Venetian Blinds Accessories
- 133 Tube Fitting Quick Guide













TUBE & ACCESSORIES













Remarks or more options, please contact our sales consultant

DM25 Motor ($\Phi 40/\Phi 38$)

DM28 Motor ($\Phi 40/\Phi 38$)

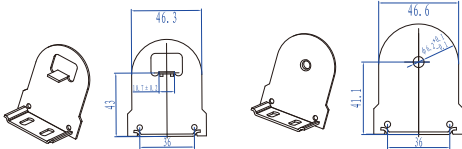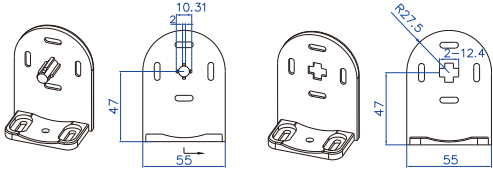Tube	 <p>38mm round tube</p>	 <p>DG19</p>
Crown	 <p>DH330</p>	 <p>DH386</p>
Drive adaptor	 <p>DL379</p>	 <p>DL386</p>
Idler	 <p>DW119A</p>	 <p>DW120</p>
Bracket	 <p>DZ591C DZ591B</p>	 <p>DZ592B DZ592</p>

DM35 /DM45 Motor ($\Phi 55$)

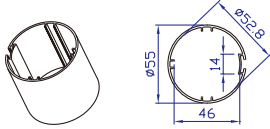Tube	 <p>DG03</p>	
Crown	 <p>DH178</p>	 <p>DH100</p>
Drive adaptor	 <p>DL02</p>	 <p>DL02</p>
Idler	<p>Not Required</p>	 <p>DW44A</p>
Bracket	 <p>DZ319B</p>  <p>DZ318B</p>	 <p>DZ382H</p>  <p>DZ382G</p>
Middle Support Bracket	 <p>DZ411MA</p>	 <p>DZ411MB</p>

CROWN & ADAPTOR

Φ15

Remarks or more options, please contact our sales consultant






<p>Crown DH352</p> <p>Rubber</p>	<p>Drive Adaptor DL406</p> <p>Rubber</p>	<p>Crown DH443</p> <p>Plastic</p>	<p>Drive Adaptor DL511</p> <p>Plastic</p>	<p>Crown DH511</p> <p>Plastic</p>	<p>Drive Adaptor DL575</p> <p>Plastic</p>
----------------------------------	--	-----------------------------------	---	-----------------------------------	---

Φ25

















<p>Crown DH241</p> <p>Plastic</p>	<p>Drive Adaptor DL265</p> <p>Plastic</p>	<p>Crown DH345</p> <p>Plastic</p>	<p>Drive Adaptor DL399</p> <p>Plastic</p>	<p>Crown DH447</p> <p>Plastic</p>	<p>Drive Adaptor DL516</p> <p>Plastic</p>
<p>Crown DH351</p> <p>Plastic</p>	<p>Drive Adaptor DL408</p> <p>Plastic</p>	<p>Crown DH319</p> <p>Plastic</p>	<p>Drive Adaptor DL367</p> <p>Plastic</p>	<p>Crown DH454</p> <p>Plastic</p>	<p>Drive Adaptor DL523</p> <p>Plastic</p>
<p>Crown DH330</p> <p>Plastic</p>	<p>Drive Adaptor DL379</p> <p>Plastic</p>	<p>Crown DH371</p> <p>Plastic</p>	<p>Drive Adaptor DL441</p> <p>Plastic</p>	<p>Crown DH471</p> <p>Plastic</p>	<p>Drive Adaptor DL547</p> <p>Plastic</p>
<p>Crown DH338</p> <p>Plastic</p>	<p>Drive Adaptor DL386</p> <p>Plastic</p>	<p>Crown DH444</p> <p>Plastic</p>	<p>Drive Adaptor DL513</p> <p>Plastic</p>	<p>Crown DH472</p> <p>Plastic</p>	<p>Drive Adaptor DL549</p> <p>Plastic</p>

Φ28

Remarks or more options, please contact our sales consultant

<p>Crown DH386</p>  <p>Plas ic</p>	<p>Drive Adaptor DL386</p>  <p>Plas ic</p>	<p>Crown DH422</p>  <p>Plas ic</p>	<p>Drive Adaptor DL489</p>  <p>Plas ic</p>	<p>Crown DH430</p>  <p>DM28+DH430 =DM35 Tubular Motor in side</p>
---	---	---	---	--































Φ35

<p>Crown DH423</p>  <p>Plas ic</p>	<p>Crown DH138</p>  <p>Plas ic</p>	<p>Crown DH55</p>  <p>Plas ic</p>	<p>Drive Adaptor DL65</p>  <p>Rubber</p>
<p>Crown DH448</p>  <p>Plas ic</p>	<p>Crown DH316</p>  <p>Plas ic</p>	<p>Crown DH302</p>  <p>Plas ic</p>	<p>Drive Adaptor DL345</p>  <p>Plas ic</p>
<p>Crown DH36</p>  <p>Plas ic</p>	<p>Crown DH66</p>  <p>Plas ic</p>	<p>Crown DH118</p>  <p>Plas ic</p>	<p>Drive Adaptor DL133</p>  <p>Plas ic</p>
<p>Crown DH126</p>  <p>Plas ic</p>	<p>Crown DH161</p>  <p>Plas ic</p>	<p>Crown DH16</p>  <p>Plas ic</p>	<p>Drive Adaptor DL20</p>  <p>Plas ic</p>





























CROWN & ADAPTOR

Φ35

Remarks or more options, please contact our sales consultant


















<p>Crown DH31</p>  <p>Plas ic</p>	<p>Drive Adaptor DL35</p>  <p>Plas ic</p>	<p>Crown DH47</p>  <p>Plas ic</p>	<p>Drive Adaptor DL56</p>  <p>Plas ic</p>	<p>Crown DH83</p>  <p>Plas ic</p>	<p>Drive Adaptor DL96</p>  <p>Plas ic</p>
<p>Crown DH146</p>  <p>Plas ic</p>	<p>Drive Adaptor DL164</p>  <p>Plas ic</p>	<p>Crown DH354</p>  <p>Plas ic</p>	<p>Drive Adaptor DL416</p>  <p>Plas ic</p>	<p>Crown DH71</p>  <p>Plas ic</p>	<p>Drive Adaptor DL82</p>  <p>Plas ic</p>
<p>Crown DH48</p>  <p>Plas ic</p>	<p>Drive Adaptor DL58</p>  <p>Plas ic</p>	<p>Crown DH344</p>  <p>Plas ic</p>	<p>Drive Adaptor DL397</p>  <p>Plas ic</p>	<p>Crown DH178</p>  <p>Plas ic</p>	<p>Drive Adaptor DL02</p>  <p>Plas ic</p>
<p>Crown DH162</p>  <p>Plas ic</p>	<p>Drive Adaptor DL177</p>  <p>Plas ic</p>	<p>Crown DH252</p>  <p>Plas ic</p>	<p>Drive Adaptor DL278</p>  <p>Plas ic</p>	<p>Crown DH92</p>  <p>Plas ic</p>	<p>Drive Adaptor DL107</p>  <p>Plas ic</p>
<p>Crown DH33</p>  <p>Plas ic</p>	<p>Drive Adaptor DL40</p>  <p>Plas ic</p>	<p>Crown DH95</p>  <p>Plas ic</p>	<p>Drive Adaptor DL41</p>  <p>Plas ic</p>	<p>Crown DH373</p>  <p>Plas ic</p>	<p>Drive Adaptor DL443</p>  <p>Plas ic</p>

Φ45

<p>Crown DH20</p>  <p>Plas ic</p>	<p>DM35+DH20 =DM45 Tubular Motor in side</p>	<p>Crown DH243</p>  <p>Plas ic</p>	<p>Drive Adaptor DL267</p>  <p>Plas ic</p>	<p>Crown DH88</p>  <p>Plas ic</p>	<p>Drive Adaptor DL101</p>  <p>Plas ic</p>
<p>Crown DH434</p>  <p>Plas ic</p>	<p>Crown DH230</p>  <p>Plas ic</p>	<p>Drive Adaptor DL253</p>  <p>Plas ic</p>	<p>Crown DH109</p>  <p>Plas ic</p>	<p>Drive Adaptor DL123</p>  <p>Plas ic</p>	
<p>Crown DH100</p>  <p>Plas ic</p>	<p>Drive Adaptor DL02</p>  <p>Plas ic</p>	<p>Crown DH56</p>  <p>Plas ic</p>	<p>Drive Adaptor DL71</p>  <p>Plas ic</p>	<p>Crown DH334</p>  <p>Plas ic</p>	<p>Drive Adaptor DL107</p>  <p>Plas ic</p>
<p>Crown DH285</p>  <p>Plas ic</p>	<p>Drive Adaptor DL319</p>  <p>Plas ic</p>	<p>Crown DH62</p>  <p>Plas ic</p>	<p>Drive Adaptor DL170</p>  <p>Plas ic</p>	<p>Crown DH253</p>  <p>Plas ic</p>	<p>Drive Adaptor DL279</p>  <p>Plas ic</p>
<p>Crown DH17</p>  <p>Plas ic</p>	<p>Drive Adaptor DL21</p>  <p>Plas ic</p>	<p>Crown DH38</p>  <p>Plas ic</p>	<p>Drive Adaptor DL46</p>  <p>Plas ic</p>	<p>Crown DH34</p>  <p>Plas ic</p>	<p>Drive Adaptor DL41</p>  <p>Plas ic</p>

TUBE IDLER


Remarks or more options, please contact our sales consultant

<p>dlr DW77</p> 	<p>dlr DW119A</p> 	<p>dlr DW120</p> 	<p>dlr DW110</p> 
<p>dlr DW114</p> 	<p>dlr DW13</p> 	<p>dlr DW21</p> 	<p>dlr DW22</p> 
<p>dlr DW44</p> 	<p>dlr DW05</p> 	<p>dlr DW50A</p> 	<p>dlr DW30</p> 
<p>dlr DW23</p> 	<p>dlr DW02</p> 	<p>dlr DW16</p> 	<p>dlr DW24</p> 
<p>dlr DW06</p> 	<p>dlr DW09</p> 	<p>dlr DW17</p> 	<p>dlr DW07</p> 


WALL MOUNT BRACKET

Remarks or more options, please contact our sales consultant


Motor Bracket
DZ591A




Holder Bracket
DZ591




Motor Bracket
DZ591C




Holder Bracket
DZ591B




Motor Bracket
DZ592B




Holder Bracket
DZ592




Motor Bracket
DZ382B




Holder Bracket
DZ382C




Motor Bracket
DZ382H




Holder Bracket
DZ382G



Motor Bracket
DZ319B


















Holder Bracket
DZ318B















CLICK-IN BRACKET

Remarks or more options, please contact our sales consultant
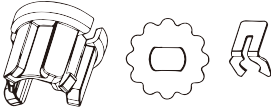
<p>Motor Bracket DZ497</p>  <p>Max 1.5Nm</p>	<p>Motor Bracket DZ520</p>  <p>Max 1.5Nm</p>	<p>Motor Bracket DZ521</p>  <p>Max 1.5Nm</p>	<p>Motor Bracket DZ592D</p>  <p>Max 1.5Nm</p>
<p>Motor Bracket 35 1 16 34Y</p>  <p>Max 3Nm</p>	<p>Motor Bracket 35 1 16 34C</p>  <p>Max 3Nm</p>	<p>Motor Bracket 35 1 36 09F</p>  <p>Max 3Nm</p>	<p>Motor Bracket 35 1 36 09E</p>  <p>Max 3Nm</p>
<p>Motor Bracket 45 1 43 30L</p>  <p>Max 6Nm</p>	<p>Motor Bracket 45 1 43B 30F</p>  <p>Max 6Nm</p>	<p>Motor Bracket 45 1 36 22C</p>  <p>Max 6Nm</p>	<p>Motor Bracket DZ409A</p>  <p>For 35-316 limit head</p>
<p>Motor Bracket DS684</p> 	<p>Drive Adaptor DS645H</p> 	<p>Track Lock DS485</p> 	

VENETIAN BLINDS MOTOR ACCESSORIES

Remarks or more options, please contact our sales consultant
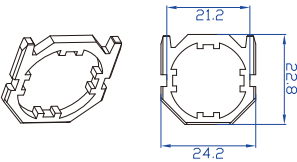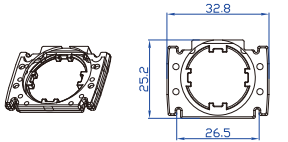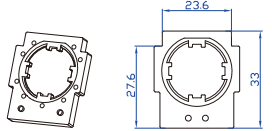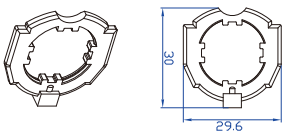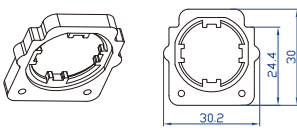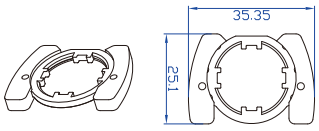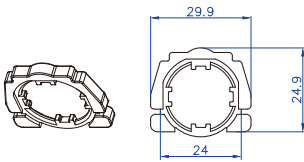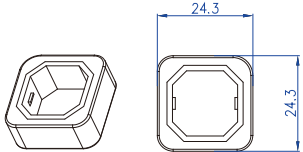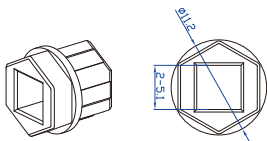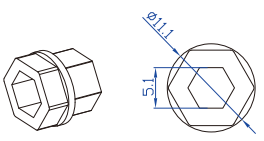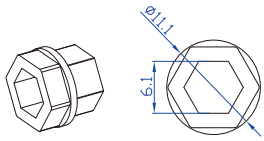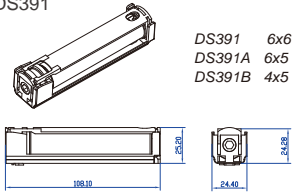
<p>Motor Bracket DS440</p> 	<p>Motor Bracket DS440A</p> 	<p>Motor Buffer Bracket DS440B</p> 	<p>Motor Buffer Bracket DS440F</p> 
<p>Motor Buffer Bracket DS440G</p> 	<p>Motor Buffer Bracket DS440</p> 	<p>Motor Adaptor DS440P</p> 	<p>Motor Adaptor DS440S</p> 
<p>Motor Adaptor DS440C</p> 	<p>Motor Adaptor DS440D</p> 	<p>Motor Adaptor DS440E</p> 	<p>Rope Winder DS391</p> <p>DS391 6x6 DS391A 6x5 DS391B 4x5</p> 

TUBE FITTING

QUICK GUIDE

